




# TRIPLE STRAND - RIVETED TYPE

Enduroline Series • ANSI Precision Roller Chain

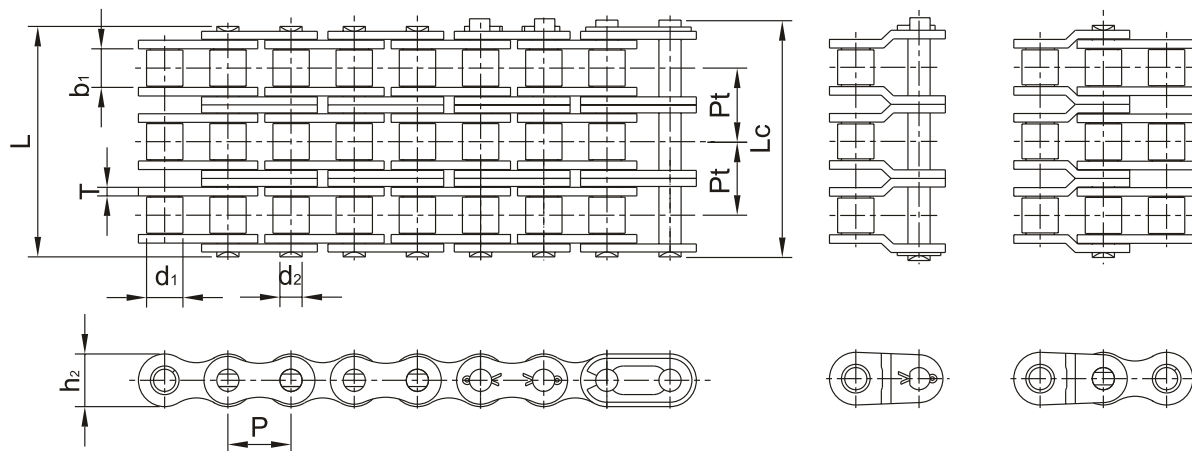

HLU ANSI Chain No.	Pitch	Roller Diameter	Width between Inner Plates	Pin Diameter	Pin Length		Inner Plate Depth	Transverse Pitch	Plate Thickness	Minimum Ultimate Tensile Strength ANSI Std.	Average Tensile Strength	Weight
	P	d1 max	b1 min	d2 max	L max	Lc max	h2 max	Pt	T	lbs	lbs	lbs/ft
	in.	in.	in.	in.	in.	in.	in.	in.	in.			
*35-3R	.3750	.2000	.1843	.1409	1.2874	1.3661	.3425	.3988	.0512	5280	6744	.71
40-3R	.5000	.3130	.3091	.1559	1.7874	1.8898	.4752	.5661	.0591	9375	11510	1.28
50-3R	.6250	.4000	.3701	.2000	2.2441	2.3543	.5941	.7130	.0811	14640	18434	2.08
60-3R	.7500	.4689	.4949	.2339	2.8150	2.9764	.7118	.8969	.0961	21090	25852	3.05
80-3R	1.0000	.6252	.6201	.3118	3.6102	3.8110	.9500	1.1531	.1283	37500	46758	5.30
100-3R	1.2500	.7500	.7441	.3752	4.4173	4.6142	1.1882	1.4079	.1575	58590	69688	7.91
120-3R	1.5000	.8752	.9929	.4370	5.5787	5.8386	1.4252	1.7890	.1890	84375	105813	11.78
140-3R	1.7500	1.0000	.9929	.5000	5.9921	6.2323	1.6630	1.9240	.2224	114840	142186	14.92
160-3R	2.0000	1.1252	1.2421	.5618	7.1575	7.4252	1.9000	2.3051	.2539	150000	181863	20.17
180-3R	2.2500	1.4059	1.3969	.6874	8.0472	8.4449	2.1382	2.5921	.2854	189840	221113	25.68
200-3R	2.5000	1.5622	1.4902	.7815	8.7992	9.1693	2.3752	2.8169	.3150	234375	276504	32.95
240-3R	3.0000	1.8752	1.8642	.9374	10.6811	11.0945	2.8500	3.4579	.3740	337500	394794	48.11

\* Chain is rollerless. Bushing diameter shown.