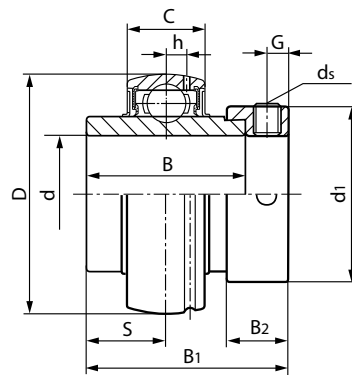


HLU Bearing No.	Bore Diameter d		Dimensions ^(in.) (mm)										Load Ratings lbs		Weight lbs
	in.	mm	D	B	B1	C	S	B2	d1	h	G	ds	Dynamic Cr	Static Cor	
NA201-08 NA202 NA202-10 NA203	½ ⅝	15 17	1.5748 40	1.0945 27.8	1.4685 37.3	0.5512 14	0.5472 13.9	0.5315 13.5	1.1260 28.6	0.1378 3.5	0.1969 5	¼ - 28UNF M6 X 0.75	2151	1056	0.35 0.31 0.31 0.29
NA204-08 NA204-10 NA204-12 NA204	½ ⅝ ¾	 20	1.8504 47	1.3465 34.2	1.7205 43.7	0.6693 17	0.6732 17.1	0.5315 13.5	1.3110 33.3	0.1475 4.0	0.1969 5	¼ - 28UNF M6 X 0.75	2886	1650	0.60 0.54 0.51 0.49
NA205-14 NA205-15 NA205 NA205-16	⅞ 1⅝ 1	 25	2.0472 52	1.3740 34.9	1.7480 44.4	0.6693 17	0.6890 17.5	0.5315 13.5	1.5000 38.1	0.1654 4.2	0.1969 5	¼ - 28UNF M6 X 0.75	3150	1771	0.62 0.58 0.55 0.53
NA206-17 NA206-18 NA206 NA206-19 NA206-20	1 ⅙ 1 ⅙ 1 ⅝ 1 ¼	 30	2.4409 62	1.4370 36.5	1.9055 48.4	0.7480 19	0.7205 18.3	0.6260 15.9	1.7520 44.5	0.1969 5.0	0.2362 6	⅝ - 24UNF M8 X 1	4375	2542	0.99 0.91 0.90 0.85 0.78
NA207-20 NA207-21 NA207-22 NA207 NA207-23	1 ¼ 1 ⅝ 1 ⅝ 1 ⅞	 35	2.8346 72	1.4803 37.6	2.0018 51.1	0.7874 20	0.7402 18.8	0.6890 17.5	2.1890 55.6	0.2244 5.7	0.2559 6.5	⅝ - 24UNF M8 X 1	5770	3440	1.46 1.41 1.33 1.30 1.26
NA208-24 NA208-25 NA208	1 ½ 1 ⅞	 40	3.1496 80	1.6850 42.8	2.2165 56.3	0.8268 21	0.8425 21.4	0.7205 18.3	2.3740 60.3	0.2480 6.3	0.2559 6.5	⅝ - 24UNF M8 X 1	6636	4078	1.79 1.70 1.63
NA209-26 NA209-27 NA209-28 NA209	1 ⅝ 1 1⅙ 1 ¾	 45	3.3465 85	1.6850 42.8	2.2165 56.3	0.8661 22	0.8425 21.4	0.7205 18.3	2.5000 63.5	0.2480 6.3	0.2559 6.5	⅝ - 24UNF M8 X 1	7120	4650	2.06 1.94 1.84 1.81
NA210-30 NA210-31 NA210 NA210-32	1 ⅞ 1 1⅝ 2	 50	3.5433 90	1.9370 49.2	2.4685 62.7	0.9449 24	0.9685 24.6	0.7205 18.3	2.7520 69.9	0.2598 6.6	0.2559 6.5	⅝ - 24UNF M8 X 1	7884	5210	2.33 2.20 2.10 2.06
NA211-32 NA211-34 NA211 NA211-35	2 2 ⅙ 2 ⅝	 55	3.9370 100	2.1850 55.5	2.8110 71.4	0.9843 25	1.0817 27.8	0.8150 20.7	3.000 76.2	0.2756 7.0	0.3150 8	⅝ - 24UNF M10 x 1.25	9752	6569	3.31 3.02 3.09 2.84
NA212-36 NA212 NA212-38 NA212-39	2 ¼ 2 ⅝ 2 ⅞	 60	4.3307 110	2.4370 61.9	3.0630 77.8	1.0630 27	1.2205 31	0.8780 22.3	3.3150 84.2	0.2992 7.6	0.3150 8	⅝ - 24UNF M10 x 1.25	10736	7403	4.48 4.12 3.89 3.68
NA213-40 NA213	2 ½	 65	4.7244 120	2.6850 68.2	3.3740 85.7	1.1024 28	1.3425 34.1	0.9252 23.5	3.3858 86	0.3504 8.9	0.3346 8.5	⅝ - 24UNF M10 x 1.25	12861	8992	5.01 5.00
NA214-44 NA214	2 ¾	 70	4.9213 125	2.6850 68.2	3.3740 85.7	1.1811 30	1.3425 34.1	0.9252 23.5	3.5433 90	0.3505 8.9	0.3346 8.5	⅝ - 24UNF M10 x 1.25	13675	10123	5.69 5.67
NA215 NA215-47 NA215-48	2 ⅝ 3	75	5.1181 130	2.9370 74.6	3.6260 92.1	1.2598 32	1.4685 37.3	0.9252 23.5	4.0157 102	0.3504 8.9	0.3346 8.5	⅝ - 24UNF M10 x 1.25	14862	11128	6.04 6.28 6.02

Also available in Non-Relube. Add "N" suffix.