
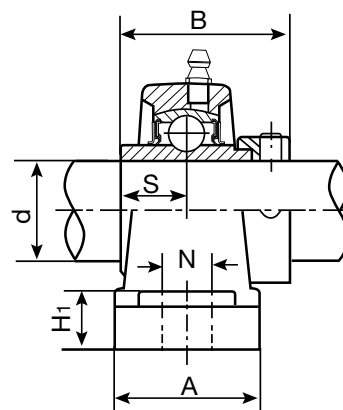
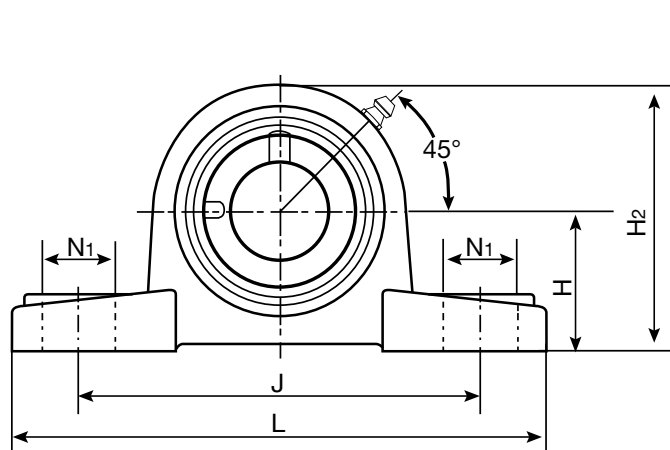


Standard B Type Seal



Optional Triple-lip seal
(+ Suffix - R3)

HLU Unit No.	Shaft Diameter		Dimensions (in./mm)										Bolt Used (in./mm)	Bearing No.	Housing No.	Weight lbs
			H	L	J	A	N	N1	H1	H2	S	B				
NAP201-08	1/2	15	1.1890	4.8819	3.7402	1.2598	0.4724	0.6299	0.5118	2.2835	0.5472	1.4685	3/8	NA201-08	P203	1.40
NAP202	5/8	17	30.2	124	95	32	12	16	13	58	13.9	37.3	10	NA202		
NAP202-10														NA202-10		
NAP203														NA203	P203 47mm	1.65
NAP204-10	5/8		1.1890	5.0000	3.7795	1.4173	0.5118	0.7480	0.5118	2.3622	0.6732	1.7205	3/8	NA204-10		
			30.2	127	96	36	13	19	13	60	17.1	43.7	10			
NAP204-12	3/4	20	1.3110	5.0000	3.7402	1.3780	0.5118	0.7480	0.5512	2.5591	0.6732	1.7205	3/8	NA204-12	P204	1.65
NAP204			33.3	127	95	35	13	19	14	65	17.1	43.7	10	NA204		
NAP205-14	7/8	25	1.4370	5.5118	4.1339	1.4961	0.5118	0.7480	0.5906	2.7953	0.6890	1.7480	3/8	NA205-14	P205	2.10
NAP205-15	15/16		36.5	140	105	38	13	19	15	71	17.5	44.4	10	NA205-15		
NAP205														NA205		
NAP205-16	1	30	1.6890	6.2992	4.7638	1.7323	0.5512	0.7480	0.6693	3.2677	0.7205	1.9055	1/2	NA205-16	P206	3.10
NAP206-17	1 1/16		42.9	160	121	44	14	19	17	83	18.3	48.4	12	NA206-17		
NAP206-18	1 1/8													NA206-18		
NAP206														NA206	P207	4.25
NAP206-19	1 3/16	35	1.8740	6.5748	5.0000	1.8898	0.5906	0.7480	0.7087	3.6614	0.7402	2.0118	1/2	NA206-19		
NAP206-20	1 1/4		47.6	167	127	48	15	19	18	93	18.8	51.1	12	NA206-20		
NAP207-20	1 1/4													NA207-20	P208	5.25
NAP207-21	1 5/16	40	1.9370	7.0866	5.3937	2.1260	0.5906	0.8268	0.7480	3.8583	0.8425	2.2165	1/2	NA207-21		
NAP207-22	1 3/8		49.2	180	137	54	15	21	19	98	21.4	56.3	12	NA207-22		
NAP207														NA207	P209	5.70
NAP207-23	1 7/16	45	2.1260	7.4803	5.7480	2.1260	0.5906	0.8268	0.7874	4.1732	0.8425	2.2165	1/2	NA207-23		
NAP208-24	1 1/2		54	190	146	54	15	21	20	106	21.4	56.3	12	NA208-24		
NAP208-25	1 5/8													NA208-25	P210	7.00
NAP208														NA208		
NAP209-26	1 5/8	50	2.2520	8.1102	6.2598	2.2441	0.7480	0.8661	0.8268	4.4882	0.9685	2.4685	5/8	NA209-26		
NAP209-27	1 11/16		57.2	206	159	57	19	22	21	114	24.6	62.7	16	NA209-27	P211	9.30
NAP209-28	1 3/4	55	2.5000	8.6220	6.7323	2.3622	0.7480	0.8661	0.9055	4.9606	1.0945	2.8110	5/8	NA209-28		
NAP209			63.5	219	171	60	19	22	23	126	27.8	71.4	16	NA209		
NAP210-30	1 7/8													NA210-30	P212	11.40
NAP210-31	1 15/16	60	2.7480	9.4882	7.2441	2.7559	0.7480	0.9843	0.9843	5.4331	1.2205	3.0630	5/8	NA210-31		
NAP210			69.8	241	184	70	19	25	25	138	31	77.8	16	NA210		
NAP210-32	2	65	3.0000	10.3937	7.9921	2.7559	0.9055	1.1417	1.0630	5.9449	1.3425	3.3740	3/4	NA210-32	P213	14.70
NAP211-32	2		76.2	264	203	70	23	29	27	151	34.1	85.7	20	NA211-32		
NAP211-34	2 1/8	70	3.1260	10.4724	8.2677	2.8346	0.9055	1.1417	1.0630	6.1811	1.3425	3.3740	3/4	NA211-34		
NAP211			79.4	266	210	72	23	29	27	157	34.1	85.7	20	NA211	P214	16.00
NAP211-35	2 3/16	75	3.2520	10.8268	8.5433	2.9134	0.9843	1.1417	1.1024	6.4173	1.4685	3.6260	3/4	NA211-35		
NAP212-36	2 1/4		82.6	275	217	74	25	29	28	163	37.3	92.1	20	NA212-36		
NAP212														NA212	P215	17.80
NAP212-38	2 3/8													NA212-38		
NAP212-39	2 7/16													NA212-39		
NAP213-40	2 1/2													NA213-40	P214	16.00
NAP213														NA213		
NAP214-44	2 3/4	70	3.1260	10.4724	8.2677	2.8346	0.9055	1.1417	1.0630	6.1811	1.3425	3.3740	3/4	NA214-44		
NAP214			79.4	266	210	72	23	29	27	157	34.1	85.7	20	NA214	P215	17.80
NAP215														NA215		
NAP215-47	2 15/16													NA215-47		
NAP215-48	3													NA215-48		