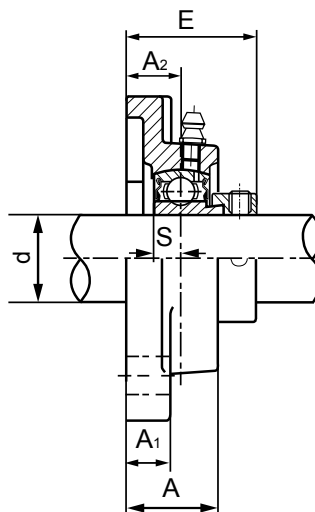
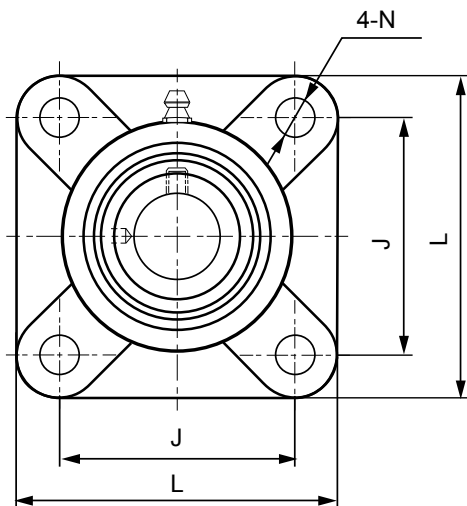


K Type Seal

HLU Unit No.	Shaft Diameter		Dimensions (in.) (mm)								Bolt Used (in.) (mm)	Bearing No.	Housing No.	Weight lbs
			L	J	A2	A1	A	N	E	S				
SAF201-08G	1/2													
SAF202G		15	3.0709	2.1260	0.3740	0.4331	0.7087	0.3937	1.2441	0.2559	3/8	SA201-08G	F203S	1.00
SAF202-10G	5/8		78	54	9.5	11	18	10	31.6	6.5	10	SA202G		
SAF203G		17										SA202-10G		
SAF204-12G	3/4		3.3858	2.5197	0.5906	0.4724	1.0040	0.4528	1.5157	0.2953	7/16	SA204-12G	F204	1.30
SAF204G		20	86	64	15	12	25.5	11.5	38.5	7.5	11	SA204G		
SAF205-14G	7/8		3.7402	2.7559	0.6299	0.5118	1.0630	0.4528	1.5551	0.2953	7/16	SA205-14G	F205	1.70
SAF205-15G	15/16		95	70	16	13	27	11.5	39.5	7.5	11	SA205-15G		
SAF205G		25										SA205G		
SAF205-16G	1											SA205-16G		
SAF206-18G	1 1/8		4.2520	3.2677	0.7087	0.5630	1.2205	0.4528	1.7598	0.3543	7/16	SA206-18G	F206	2.50
SAF206G		30	108	83	18	14.3	31	11.5	44.7	9	11	SA206G		
SAF206-19G	1 9/16											SA206-19G		
SAF206-20G	1 1/4											SA206-20G		
SAF207-20G	1 1/4		4.6063	3.6220	0.7480	0.6102	1.3386	0.5118	1.9055	0.3740	1/2	SA207-20G	F207	3.25
SAF207-21G	1 5/16		117	92	19	15.5	34	13	48.4	9.5	12	SA207-21G		
SAF207-22G	1 3/8											SA207-22G		
SAF207G		35										SA207G		
SAF207-23G	1 7/16											SA207-23G		
SAF208-24G	1 1/2		5.1181	4.0157	0.8268	0.6102	1.4173	0.5512	2.1142	0.4331	1/2	SA208-24G	F208	3.90
SAF208G		40	130	102	21	15.5	36	14	53.7	11	12	SA208G		
SAF209-26G	1 5/8		5.3937	4.1339	0.8661	0.6890	1.4961	0.6299	2.1535	0.4331	9/16	SA209-26G	F209	4.70
SAF209-27G	1 11/16		137	105	22	17.5	38	16	54.7	11	14	SA209-27G		
SAF209-28G	1 3/4											SA209-28G		
SAF209G		45										SA209G		
SAF210-30G	1 7/8		5.6299	4.3701	0.8661	0.6890	1.5748	0.6299	2.1535	0.4331	5/8	SA210-30G	F210	5.25
SAF210-31G	1 15/16		143	111	22	17.5	40	16	54.7	11	16	SA210-31G		
SAF210G		50										SA210G		
SAF210-32G	2											SA210-32G		
SAF211-32G	2		6.3780	5.1181	0.9843	0.7677	1.6929	0.6693	2.4173	0.4724	5/8	SA211-32G	F211	7.60
SAF211G		55	162	130	25	19.5	43	17	61.4	12	16	SA211G		
SAF211-35G	2 3/16											SA211-35G		

Normally supplied as relube with "G" suffix.

Non-relube units available. Please specify non-relube.