
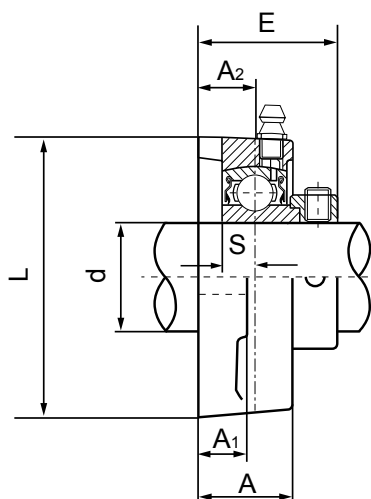
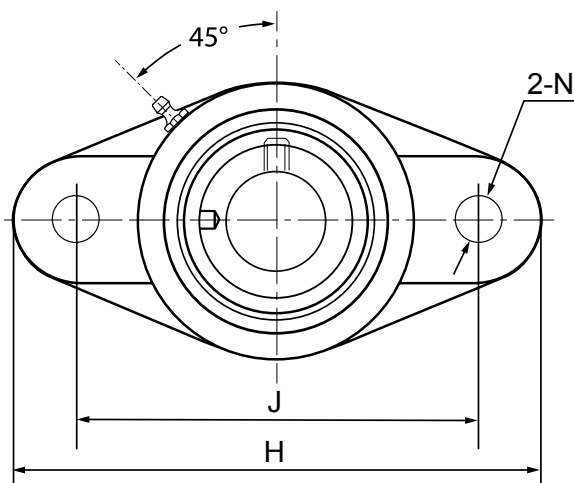


**HI-LIGHT USA**

WWW.HILIGHTUSA.COM

SAFL**Eccentric Locking Collar • Narrow Inner Ring • Cast Housing • Regreaseable****2-BOLT FLANGE UNITS
NORMAL DUTY**

K Type Seal

HLU Unit No.	Shaft Diameter		Dimensions ^(in.) _(mm)									Bolt Used ^(in.) _(mm)	Bearing No.	Housing No.	Weight lbs
	in.	mm	H	J	L	A2	A1	A	N	E	S				
SAFL201-08G	1/2	15	3.8583	3.0000	2.1260	0.4370	0.3748	0.7205	0.3937	1.3071	.2559	3/8	SA201-08G	FL203S	.75
SAFL202G			98	76.2	54	11.1	9.52	18.3	10	33.2	6.5	9	SA202G		
SAFL202-10G	5/8	17											SA202-10G		
SAFL203G													SA203G		
SAFL204-12G	3/4	20	4.4488	3.5433	2.3622	0.5906	0.4528	1.0039	0.3937	1.5157	0.2953	3/8	SA204-12G	FL204	1.00
SAFL204G			113	90	60	15	11.5	25.5	10	38.5	7.5	9	SA204G		
SAFL205-14G	7/8												SA205-14G	FL205	1.35
SAFL205-15G	15/16	25	5.1181	3.8976	2.6772	0.6299	0.5118	1.0630	0.4528	1.5551	0.2953	7/16	SA205-15G		
SAFL205G			130	99	68	16	13	27	11.5	39.5	7.5	10	SA205G		
SAFL205-16G	1												SA205-16G		
SAFL206-17G	1 1/16												SA206-17G	FL206	1.95
SAFL206-18G	1 1/8	30	5.8268	4.6063	3.1496	0.7087	0.5118	1.2205	0.4528	1.7598	0.3543	7/16	SA206-18G		
SAFL206G			148	117	80	18	13	31	11.5	44.7	9.0	10	SA206G		
SAFL206-19G	1 3/16												SA206-19G		
SAFL206-20G	1 1/4												SA206-20G		
SAFL207-20G	1 1/4												SA207-20G	FL207	2.60
SAFL207-21G	1 5/16		6.3386	5.1181	3.5433	0.7480	0.5906	1.3386	0.5118	1.9055	0.3740	1/2	SA207-21G		
SAFL207-22G	1 3/8	35	161	130	90	19	15	34	13	48.4	9.5	12	SA207-22G		
SAFL207G													SA207G		
SAFL207-23G	1 7/16												SA207-23G		
SAFL208-24G	1 1/2												SA208-24G	FL208	3.50
SAFL208-25G	1 5/8	40	6.8898	5.6693	3.9370	0.8268	0.5906	1.4173	0.5118	2.1142	0.4331	1/2	SA208-25G		
SAFL208G			175	144	100	21	15	36	13	53.7	11.0	12	SA208G		
SAFL209-26G	1 5/8												SA209-26G	FL209	3.90
SAFL209-27G	1 11/16		7.4016	5.8268	4.2520	0.8661	0.6299	1.4961	0.5906	2.1535	0.4331	9/16	SA209-27G		
SAFL209-28G	1 3/4	45	188	148	108	22	16	38	15	54.7	11.0	14	SA209-28G		
SAFL209G													SA209G		
SAFL210-30G	1 7/8												SA210-30G	FL210	4.70
SAFL210-31G	1 15/16		7.7559	6.1811	4.5276	0.8661	0.6299	1.5748	0.5906	2.1535	0.4331	9/16	SA210-31G		
SAFL210G		50	197	157	115	22	16	40	15	54.7	11.0	14	SA210G		
SAFL210-32G	2												SA210-32G		
SAFL211-32G	2												SA211-32G	FL211	6.55
SAFL211G		55	8.8189	7.2441	5.1181	0.9842	0.7087	1.6929	0.6496	2.4173	0.4721	5/8	SA211G		
SAFL211-35G	2 3/16		224	184	130	25	18	43	16.5	61.4	12.0	16	SA211-35G		

Normally supplied as relube with "G" suffix.

Non-relube units available. Please specify non-relube.