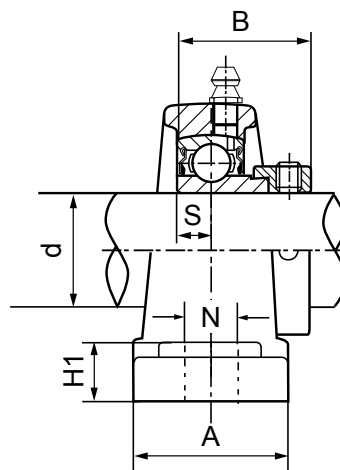
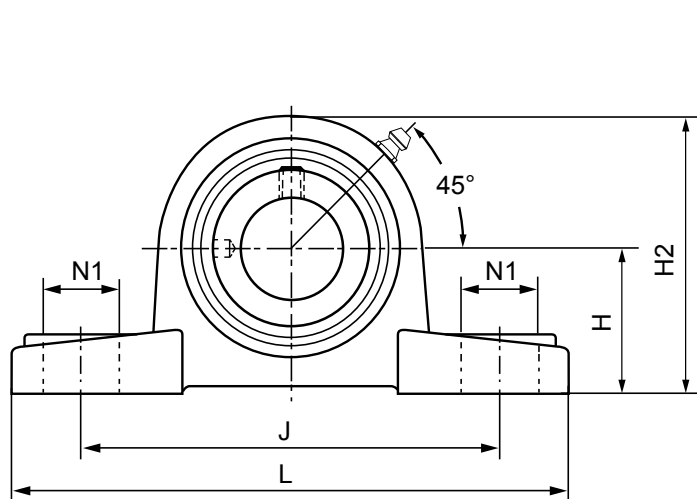

K Type Seal

HLU Unit No.	Shaft Diameter		Dimensions ^(in.) (mm)										Bolt Used ^(in.) (mm)	Bearing No.	Housing No.	Weight lbs
			H	L	J	A	N	N1	H1	H2	S	B				
SAP201-08G	1/2	15	1.1890	4.8819	3.7402	1.2598	0.4724	0.6299	0.5118	2.2835	0.2559	1.1260	3/8	SA201-08G	P203	1.35
SAP202G	5/8	17	30.2	124	95	32	12	16	13	58	6.5	28.6	10	SA202G		
SAP202-10G														SA202-10G		
SAP203G														SA203G		
SAP204-12G	3/4	20	1.3110	5.0000	3.7402	1.3780	0.5118	0.7480	0.5512	2.5590	0.2953	1.2205	3/8	SA204-12G	P204	1.55
SAP204G			33.3	127	95	35	13	19	14	65	7.5	31.0	10	SA204G		
SAP205-14G	7/8	25	1.4370	5.5118	4.1338	1.4961	0.5118	0.7480	0.5906	2.7953	0.2953	1.2205	3/8	SA205-14G	P205	2.00
SAP205-15G	15/16		36.5	140	105	38	13	19	15	71	7.5	31.0	10	SA205-15G		
SAP205G														SA205G		
SAP205-16G	1													SA205-16G		
SAP206-17G	1 1/16	30	1.6890	6.2992	4.7638	1.7323	0.5512	0.7480	0.6693	3.2677	0.3543	1.4055	1/2	SA206-17G	P206	3.00
SAP206-18G	1 1/8		42.9	160	121	44	14	19	17	83	9.0	35.7	12	SA206-18G		
SAP206G														SA206G		
SAP206-19G	1 3/16													SA206-19G		
SAP206-20G	1 1/4													SA206-20G		
SAP207-20G	1 1/4	35	1.8740	6.5748	5.0000	1.8898	0.5906	0.7480	0.7087	3.6614	0.3740	1.5315	1/2	SA207-20G	P207	3.85
SAP207-21G	1 5/16		47.6	167	127	48	15	19	18	93	9.5	38.9	12	SA207-21G		
SAP207-22G	1 3/8													SA207-22G		
SAP207G														SA207G		
SAP207-23G	1 7/16													SA207-23G		
SAP208-24G	1 1/2	40	1.9370	7.0866	5.3939	2.1260	0.5906	0.8268	0.7480	3.8583	0.4331	1.7205	1/2	SA208-24G	P208	5.00
SAP208-25G	1 9/16		49.2	180	137	54	15	21	19	98	11.0	43.7	12	SA208-25G		
SAP208G														SA208G		
SAP209-26G	1 5/8	45	2.1260	7.4803	5.7480	2.1260	0.5906	0.8268	0.7874	4.1732	0.4331	1.7205	1/2	SA209-26G	P209	5.40
SAP209-27G	1 11/16		54.0	190	146	54	15	21	20	106	11.0	43.7	12	SA209-27G		
SAP209-28G	1 3/4													SA209-28G		
SAP209G														SA209G		
SAP210-30G	1 7/8	50	2.2520	8.1102	6.2598	2.3622	0.7480	0.8661	0.8268	4.4882	0.4331	1.7205	5/8	SA210-30G	P210	6.50
SAP210-31G	1 15/16		57.2	206	159	60	19	22	21	114	11.0	43.7	16	SA210-31G		
SAP210G														SA210G		
SAP210-32G	2													SA210-32G		
SAP211-32G	2	55	2.5000	8.6220	6.7323	2.3622	0.7480	0.8661	0.9055	4.9606	0.4721	1.9055	5/8	SA211-32G	P211	8.55
SAP211G			63.5	219	171	60	19	22	23	126	12.0	48.4	16	SA211G		
SAP211-35G	2 3/16													SA211-35G		

Normally supplied as relube with "G" suffix.

Non-relube units available. Please specify non-relube.