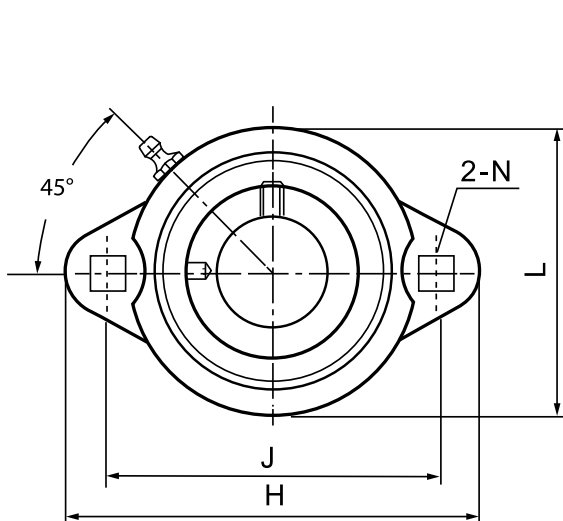


K Type Seal

HLU Unit No.	Shaft Diameter in. mm		Dimensions ^(in.) _(mm)									Bolt Used (in.) (mm)	Bearing No.	Housing No.	Weight lbs
			H	J	L	A2	A1	A	N	E	S				
SAPFTD201-08G	1/2		3.1890	2.5000	2.2047	0.3740	0.3740	0.7087	9/32	1.2441	0.2559	1/4	SA201-08G	PFTD203	.60
SAPFTD202G		15	81	63.5	56	9.5	9.5	18	7.1	31.6	6.5	6	SA202G		
SAPFTD202-10G	5/8												SA202-10G		
SAPFTD203G		17											SA203G		
SAPFTD204-12G	3/4		3.5630	2.8110	2.3740	0.4331	0.4331	0.7795	11/32	1.3583	0.2953	5/16	SA204-12G	PFTD204	.80
SAPFTD204G		20	90.5	71.4	60.3	11	11	19.8	8.73	34.5	7.5	8	SA204G		
SAPFTD205-14G	7/8		3.7520	3.0000	2.6378	0.4882	0.4409	0.8504	11/32	1.4134	0.2953	5/16	SA205-14G	PFTD205	.85
SAPFTD205-15G	15/16		95.3	76.2	67	12.4	11.2	21.6	8.73	35.9	7.5	8	SA205-15G		
SAPFTD205G		25											SA205G		
SAPFTD205-16G	1												SA205-16G		
SAPFTD206-17G	1 1/16		4.4370	3.5630	3.0945	0.5630	0.4724	0.9370	13/32	1.6142	0.3543	3/8	SA206-17G	PFTD206	1.35
SAPFTD206-18G	1 1/8		112.7	90.5	78.6	14.3	12	23.8	10.3	41	9	10	SA206-18G		
SAPFTD206G		30											SA206G		
SAPFTD206-19G	1 3/16												SA206-19G		
SAPFTD206-20G	1 1/4												SA206-20G		
SAPFTD207-20G	1 1/4		4.8110	3.9370	3.5039	0.5630	0.5000	1.0630	13/32	1.7205	0.3740	3/8	SA207-20G	PFTD207	1.80
SAPFTD207-21G	1 5/16		122.2	100	89	14.3	12.7	27	10.3	43.7	9.5	10	SA207-21G		
SAPFTD207-22G	1 3/8												SA207-22G		
SAPFTD207G		35											SA207G		
SAPFTD207-23G	1 7/16												SA207-23G		

Normally supplied as relube with "G" suffix.

Non-relube units available. Please specify non-relube.