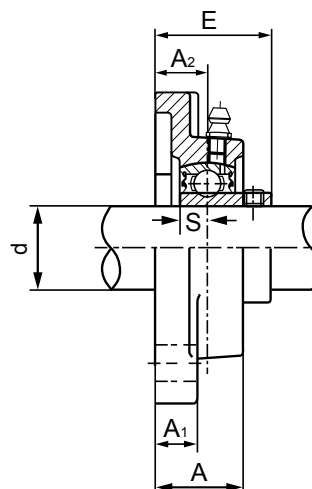
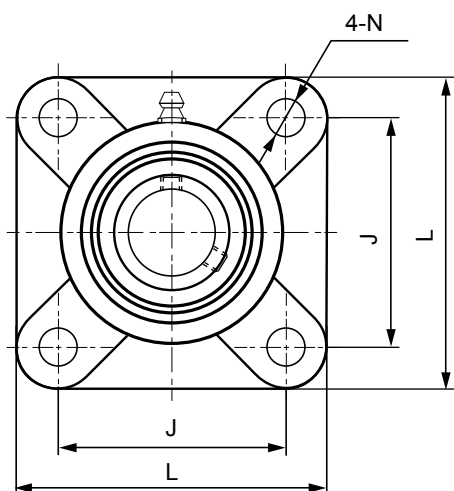


K Type Seal

HLU Unit No.	Shaft Diameter		Dimensions ^(in.) _(mm)								Bolt Used ^(in.) _(mm)	Bearing No.	Housing No.	Weight lbs
			L	J	A2	A1	A	N	E	S				
SBF201-08G	1/2	15	3.0709	2.1260	0.3740	0.4331	0.7087	0.3937	1.0039	0.2362	3/8	SB201-08G	F203S	.95
SBF202G	5/8	17	78	54	9.5	11	18	10	25.5	6	10	SB202G		
SBF203G												SB203G		
SBF204-12G	3/4	20	3.3858	2.5197	0.5906	0.4724	1.0039	0.4528	1.2992	0.2756	7/16	SB204-12G	F204	1.20
SBF204G			86	64	15	12	25.5	11.5	33	7	11	SB204G		
SBF205-14G	7/8	25	3.7402	2.7559	0.6299	0.5118	1.0630	0.4528	1.3976	0.2953	7/16	SB205-14G	F205	1.65
SBF205-15G	15/16		95	70	16	13	27	11.5	35.5	7.5	11	SB205-15G		
SBF205G	1											SB205G		
SBF205-16G												SB205-16G		
SBF206-18G	1 1/8	30	4.2520	3.2677	0.7087	0.5630	1.2205	0.4528	1.5748	0.3150	7/16	SB206-18G	F206	2.30
SBF206G	1 3/16		108	83	18	14.3	31	11.5	40	8	11	SB206G		
SBF206-19G	1 1/4											SB206-19G		
SBF206-20G												SB206-20G		
SBF207-20G	1 1/4	35	4.6063	3.6220	0.7480	0.6102	1.3386	0.5118	1.6732	0.3346	1/2	SB207-20G	F207	3.05
SBF207-21G	1 5/16		117	92	19	15.5	34	13	42.5	8.5	12	SB207-21G		
SBF207-22G	1 3/8											SB207-22G		
SBF207G	1 7/16											SB207G		
SBF207-23G												SB207-23G		
SBF208-24G	1 1/2	40	5.1181	4.0157	0.8268	0.6102	1.4173	0.5512	1.8110	0.3543	1/2	SB208-24G	F208	3.50
SBF208G			130	102	21	15.5	36	14	46	9	12	SB208G		
SBF209-26G	1 5/8	45	5.3937	4.1339	0.8661	0.6890	1.4961	0.6299	2.0866	0.4016	9/16	SB209-26G	F209	4.50
SBF209-27G	1 11/16		137	105	22	17.5	38	16	53	10.2	14	SB209-27G		
SBF209-28G	1 3/4											SB209-28G		
SBF209G												SB209G		
SBF210-30G	1 7/8	50	5.6299	4.3701	0.8661	0.6890	1.5748	0.6299	2.1496	0.4291	5/8	SB210-30G	F210	4.85
SBF210-31G	1 15/16		143	111	22	17.5	40	16	54.6	10.9	16	SB210-31G		
SBF210G	2											SB210G		
SBF210-32G												SB210-32G		
SBF215S-47G*	2 5/16	-	7.6260	6.0000	0.9646	0.7480	1.9370	0.7795	2.5000	0.5709	3/4	SB215-47G	F215S	14.65
			193.7	152.4	24.5	19	49.2	19.8	63.5	14.5	19			

Normally supplied as relube with "G" suffix.

Non-relube units available. Please specify non-relube.

*Solid Back Housing. Black Oxide Inner Ring.