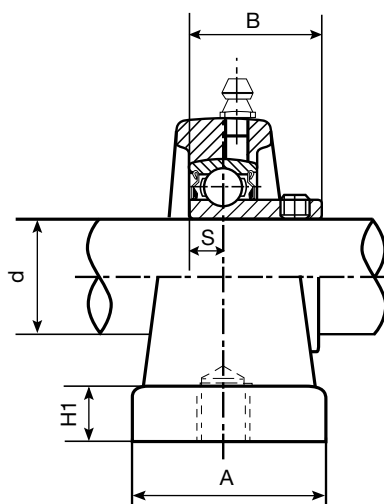
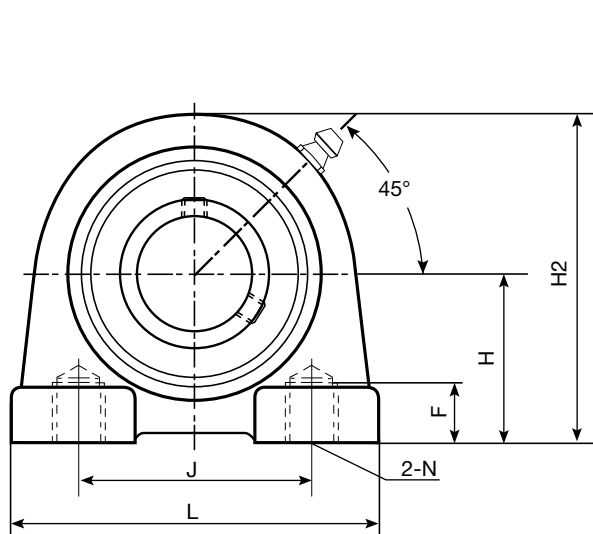


K Type Seal

HLU Unit No.	Shaft Diameter		Dimensions (in.) (mm)									Tapped Holes	Bearing No.	Housing No.	Weight lbs
			H	L	J	A	H1	H2	F	S	B	2-N			
SBPA204-12G SBPA204G	3/4	20	1.3110 33.3	2.8740 73	2.0000 50.8	1.4961 38	0.4331 11	2.5591 65	1/2 13	0.2756 7	0.9842 25	3/8 - 16UNC	SB204-12G SB204G	PA204	1.10
SBPA205-14G SBPA205-15G SBPA205G SBPA205-16G	7/8 1 1/16 1	25	1.4370 36.5	2.9921 76	2.0000 50.8	1.4961 38	0.4724 12	2.7953 71	1/2 13	0.2953 7.5	1.0630 27	3/8 - 16UNC	SB205-14G SB205-15G SB205G SB205-16G	PA205	1.45
SBPA206-17G SBPA206-18G SBPA206G SBPA206-19G SBPA206-20G	1 1/16 1 1/8 1 3/16 1 1/4	30	1.6890 42.9	4.0157 102	3.0000 76.2	1.4961 38	0.4724 12	3.4252 87	5/8 16	0.3150 8	1.1811 30	7/16 - 14UNC	SB206-17G SB206-18G SB206G SB206-19G SB206-20G	PA206	2.45
SBPA207-20G SBPA207-21G SBPA207-22G SBPA207G SBPA207-23G	1 1/4 1 5/16 1 3/8 1 7/16	35	1.8740 47.6	4.2520 108	3.2480 82.5	1.8898 48	0.4724 12	3.7402 95	3/4 19	0.3346 8.5	1.2598 32	1/2 - 13UNC	SB207-20G SB207-21G SB207-22G SB207G SB207-23G	PA207	3.35
SBPA208-24G SBPA208-25G SBPA208G	1 1/2 1 9/16	40	1.9370 49.2	4.6260 117.5	3.5000 88.9	1.8898 48	0.4724 12	3.9370 100	3/4 19	0.3543 9	1.3386 34	1/2 - 13UNC	SB208-24G SB208-25G SB208G	PA208	3.70
SBPA209-26G SBPA209-27G SBPA209-28G SBPA209G	1 5/8 1 11/16 1 3/4	45	2.1260 54	5.0000 127	3.7520 95.3	2.0079 51	0.4724 12	4.2520 108	3/4 19	0.4016 10.2	1.6220 41.2	1/2 - 13UNC	SB209-26G SB209-27G SB209-28G SB209G	PA209	5.20
SBPA210-30G SBPA210-31G SBPA210G SBPA210-32G	1 7/8 1 15/16 2	50	2.2500 57.15	5.5118 140	4.0000 101.6	2.0079 51	0.5512 14	4.6260 117.5	31/32 25	0.4291 10.9	1.7126 43.5	5/8 - 11UNC	SB210-30G SB210-31G SB210G SB210-32G	PA210	6.30

Normally supplied as relube with "G" suffix.

Non-relube units available. Please specify non-relube.