
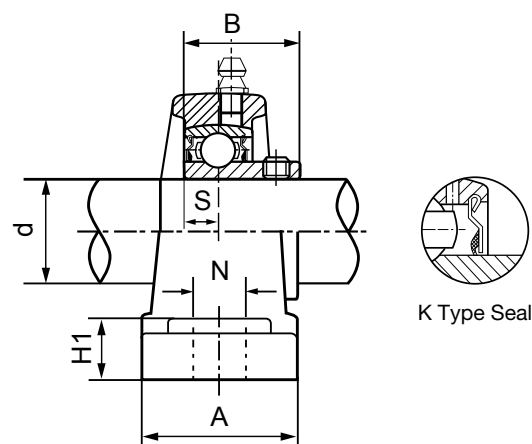


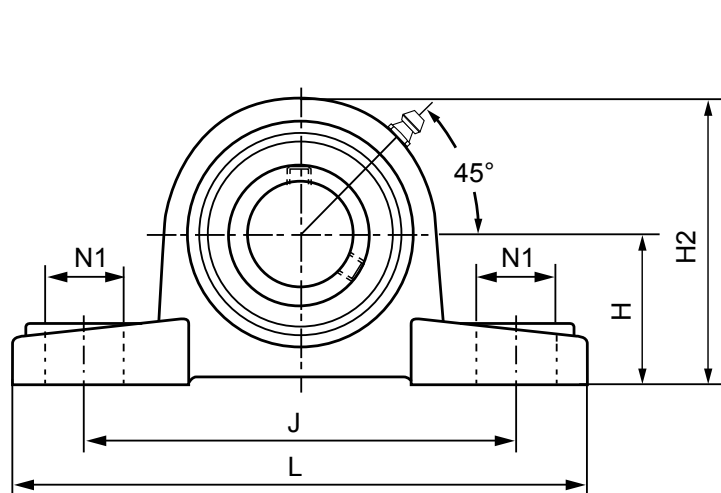

HLU Unit No.	Shaft Diameter		Dimensions (in.) (mm)										Bolt Used (in.) (mm)	Bearing No.	Housing No.	Weight lbs
	in.	mm	H	L	J	A	N	N1	H1	H2	S	B				
SBPL201-08G SBPL202G SBPL202-10G SBPL203G	1/2 5/8	15 17	1.0630 27	4.8820 124	3.6220 92	1.1890 30.2	0.4331 11	0.8661 22	0.3504 8.9	2.1260 54	0.2362 6	0.8661 22	3/8 10	SB201-08G SB202G SB202-10G SB203G	PL203	1.00
SBPL204-12G SBPL204G	3/4	20	1.2520 31.8	5.2362 133	3.8583 98	1.6142 41	0.4331 11	0.5512 14	0.5512 14	2.4803 63	0.2756 7	0.9842 25	3/8 10	SB204-12G SB204G	PL204	1.65
SBPL205-14G SBPL205-15G SBPL205G SBPL205-16G	7/8 1 1/16 1	25	1.3110 33.3	5.5118 140	4.1339 105	1.4961 38	0.4528 11.5	0.8386 21.3	0.6299 16	2.6772 68	0.2953 7.5	1.0630 27	3/8 10	SB205-14G SB205-15G SB205G SB205-16G	PL205	1.85
SBPL206-18G SBPL206G SBPL206-19G SBPL206-20G	1 1/8 1 3/16 1 1/4	30	1.5630 39.7	8.2992 160	4.7638 121	1.8898 48	0.5512 14	0.7480 19	0.6693 17	3.1496 80	0.3150 8	1.1811 30	1/2 12	SB206-18G SB206G SB206-19G SB206-20G	PL206	3.00
SBPL207-20G SBPL207-21G SBPL207-22G SBPL207G SBPL207-23G	1 1/4 1 5/16 1 3/8 1 7/16	35	1.8110 46	6.5748 167	5.0000 127	1.8898 48	0.5512 14	0.7480 19	0.7480 19	3.6220 92	0.3346 8.5	1.2598 32	1/2 12	SB207-20G SB207-21G SB207-22G SB207G SB207-23G	PL207	3.70
SBPL208-24G SBPL208G	1 1/2	40	1.9370 49.2	7.1260 181	5.5118 140	2.1260 54	0.6299 16	0.7480 19	0.7480 19	3.9370 100	0.3543 9	1.3386 34	1/2 12	SB208-24G SB208G	PL208	4.70
SBPL209-27G SBPL209-28G SBPL209G	1 11/16 1 3/4	45	2.0630 52.4	7.4803 190	5.7480 146	2.1260 54	0.6299 16	0.7480 19	0.8268 21	4.1732 106	0.4016 10.2	1.6220 41.2	1/2 12	SB209-27G SB209-28G SB209G	PL209	5.60
SBPL210-31G SBPL210G	1 15/16	50	2.1890 55.6	7.9921 203	6.2598 159	2.2441 57	0.6890 17.5	0.8268 21	0.8662 22	4.4488 113	0.4291 10.9	1.7126 43.5	5/8 16	SB210-31G SB210G	PL210	6.90

Normally supplied as relube with "G" suffix.

Non-relube units available. Please specify non-relube.