
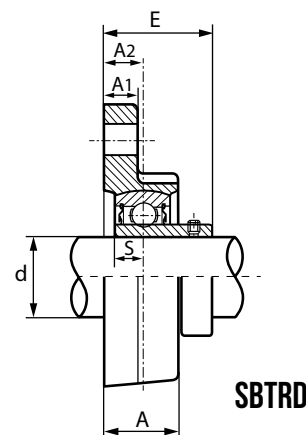
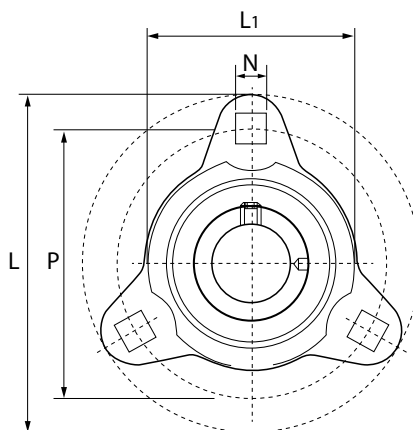


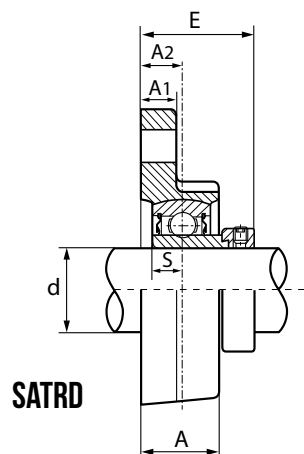

K Type Seal

SATRD - Eccentric Locking Collar

HLU Unit No.	Shaft Diameter		Dimensions (in.) (mm)									Bolt Used (in.) (mm)	Bearing No.	Housing No.	Weight lbs
			L	P	L1	A2	A1	A	N	E	S				
SATRD204-12G SATRD204G	3/4	20	3.5433 90	2.8110 71.4	2.6378 67	0.4488 11.4	0.4431 11	0.7874 20	0.3425 8.7	1.3740 34.9	0.2953 7.5	5/16 8	SA204-12G SA204G	TRD204	0.90
SATRD205-14G SATRD205-15G SATRD205G SATRD205-16G	7/8 1 1/16 1	25	3.7480 95.2	3.0000 76.2	2.5984 66	0.4921 12.5	0.4431 11	0.8661 22	0.3425 8.7	1.4173 36	0.2953 7.5	5/16 8	SA205-14G SA205-15G SA205G SA205-16G	TRD205	0.90
SATRD206-17G SATRD206-18G SATRD206G SATRD206-19G SATRD206-20G	1 1/16 1 1/8 1 3/16 1 1/4	30	4.4370 112.7	3.5630 90.5	3.2283 82	0.5630 14.3	0.4724 12	1.0000 25.4	0.4055 10.3	1.6142 41	0.3543 9.0	3/8 10	SA206-17G SA206-18G SA206G SA206-19G SA206-20G	TRD206	1.35
SATRD207-20G SATRD207-21G SATRD207-22G SATRD207G SATRD207-23G	1 1/4 1 5/16 1 3/8 1 7/16	35	4.8031 122	3.9370 100	3.4646 88	0.5118 13	0.5118 13	0.9449 24	0.4055 10.3	1.6693 42.4	0.3740 9.5	3/8 10	SA207-20G SA207-21G SA207-22G SA207G SA207-23G	TRD207	1.95

SBTRD - Set Screw Locking

HLU Unit No.	Shaft Diameter		Dimensions (in.) (mm)									Bolt Used (in.) (mm)	Bearing No.	Housing No.	Weight lbs
			L	P	L1	A2	A1	A	N	E	S				
SBTRD204-12G SBTRD204G	3/4	20	3.5433 90	2.8110 71.4	2.6378 67	0.4488 11.4	0.4431 11	0.7874 20	0.3425 8.7	1.1575 29.4	0.2756 7	5/16 8	SB204-12G SB204G	TRD204	0.80
SBTRD205-14G SBTRD205-15G SBTRD205G SBTRD205-16G	7/8 1 1/16 1	25	3.7480 95.2	3.0000 76.2	2.5984 66	0.4921 12.5	0.4431 11	0.8661 22	0.3425 8.7	1.2598 32	0.2953 7.5	5/16 8	SB205-14G SB205-15G SB205G SB205-16G	TRD205	0.80
SBTRD206-17G SBTRD206-18G SBTRD206G SBTRD206-19G SBTRD206-20G	1 1/16 1 1/8 1 3/16 1 1/4	30	4.4370 112.7	3.5630 90.5	3.2283 82	0.5630 14.3	0.4724 12	1.0000 25.4	0.4055 10.3	1.4291 36.3	0.3150 8	3/8 10	SB206-17G SB206-18G SB206G SB206-19G SB206-20G	TRD206	1.20
SBTRD207-20G SBTRD207-21G SBTRD207-22G SBTRD207G SBTRD207-23G	1 1/4 1 5/16 1 3/8 1 7/16	35	4.8031 122	3.9370 100	3.4646 88	0.5118 13	0.5118 13	0.9449 24	0.4055 10.3	1.4370 36.5	0.3346 8.5	3/8 10	SB207-20G SB207-21G SB207-22G SB207G SB207-23G	TRD207	1.75

Normally supplied as relube with "G" suffix.

Non-relube units available. Please specify non-relube.