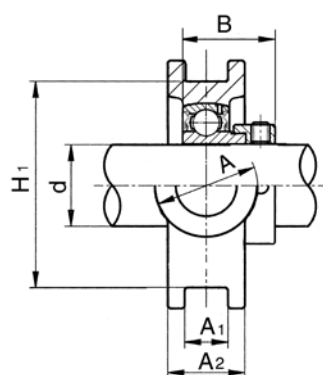
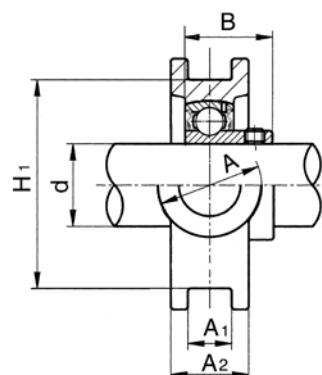
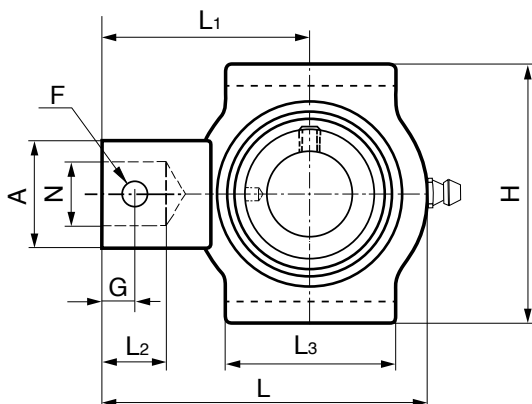




SATRS-H

SBTRS-H

K Type Seal
SATRS-H - Eccentric Locking Collar

HLU Unit No.	Shaft Diameter		Dimensions (in.) (mm)												Bearing No.	Housing No.	Weight lbs
			L	L1	L2	L3	H	H1	A	A1	A2	G	F	N	B		
SATRS205H-14G	7/8	25	3.5630	2.1890	0.8740	1.5000	3.1260	2.6260	1.3780	0.2520	0.8661	0.4370	0.3110	0.7677	1.2205	TRS205H	1.35
SATRS205H-15G	15/16		90.5	55.6	22.2	38.1	79.4	66.7	35	6.4	22	11.1	7.9	19.5	31		
SATRS205H-16G	1																
SATRS206H-17G	1 1/16	30	4.3110	2.6890	0.9370	2.5000	4.1339	3.5000	1.3780	0.2520	0.9685	0.5000	0.3110	0.7677	1.4055	TRS206H	2.55
SATRS206H-18G	1 1/8		109.5	68.3	23.8	63.5	105	88.9	35	6.4	24.6	12.7	7.9	19.5	35.7		
SATRS206H-19G	1 3/16																
SATRS206H-20G	1 1/4																

SBTRS-H - Set Screw Locking

HLU Unit No.	Shaft Diameter		Dimensions (in.) (mm)												Bearing No.	Housing No.	Weight lbs
			L	L1	L2	L3	H	H1	A	A1	A2	G	F	N	B		
SBTRS205H-14G	7/8	25	3.5630	2.1890	0.8740	1.5000	3.1260	2.6260	1.3780	0.2520	0.8661	0.4370	0.3110	0.7677	1.0630	TRS205H	1.30
SBTRS205H-15G	15/16		90.5	55.6	22.2	38.1	79.4	66.7	35	6.4	22	11.1	7.9	19.5	27		
SBTRS205H-16G	1																
SBTRS206H-17G	1 1/16	30	4.3110	2.6890	0.9370	2.5000	4.1339	3.5000	1.3780	0.2520	0.9685	0.5000	0.3110	0.7677	1.1811	TRS206H	2.40
SBTRS206H-18G	1 1/8		109.5	68.3	23.8	63.5	105	88.9	35	6.4	24.6	12.7	7.9	19.5	30		
SBTRS206H-19G	1 3/16																
SBTRS206H-20G	1 1/4																

Normally supplied as relube with "G" suffix.

Non-relube units available. Please specify non-relube.