
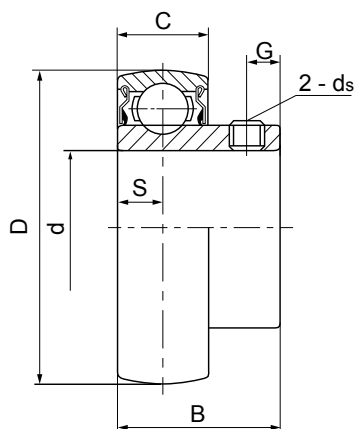


**HI-LIGHT USA**


WWW.HILIGHTUSA.COM

SB & CSB**BEARING INSERTS
NORMAL DUTY****Set Screw Locking • Narrow Inner Ring**


SB2
Spherical OD
Non-Regreasable

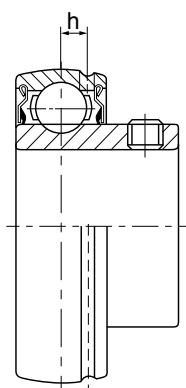

SB2 G
Spherical OD
Regreasable



CSB 2
Cylindrical OD
Non-Regreasable



K Type Seal

HLU Bearing No.	Bore Diameter d		Dimensions (in.) (mm)							Load Ratings lbs		Weight lbs
			D	B	C	S	h	G	ds	Dynamic Cr	Static Cor	
SB201-08	1/2	15	1.5748	0.8661	0.4724	0.2362	0.1378	0.1772	10-32UNF	2151	1056	.22
SB202			40	22	12	6	3.5	4.5	M5X0.8			.20
SB202-10	5/8	17										.20
SB203												.18
SB204-12	3/4	20	1.8504	0.9842	0.5512	0.2756	0.1575	0.1772	1/4-28UNF	2886	1650	.29
SB204			47	25	14	7	4	4.5	M6X0.75			.27
SB205-14	7/8		2.0472	1.0630	0.5906	0.2953	0.1654	0.1969	1/4-28UNF	3150	1771	.40
SB205-15	15/16	25	52	27	15	7.5	4.2	5	M6X0.75			.37
SB205												.37
SB205-16	1											.35
SB206-17	1 1/16									4375	2542	.62
SB206-18	1 1/8	30	2.4409	1.1811	0.6299	0.3150	0.1969	0.2165	1/4-28UNF			.57
SB206			62	30	16	8	5	5.5	M6X0.75			.55
SB206-19	1 3/16											.55
SB206-20	1 1/4											.51
SB207-20	1 1/4									5770	3440	.90
SB207-21	1 5/16	35	2.8346	1.2598	0.6693	0.3346	0.2244	0.2362	5/16-24UNF			.86
SB207-22	1 3/8		72	32	17	8.5	5.7	6	M8X1			.82
SB207												.82
SB207-23	1 7/16											.77
SB208-24	1 1/2									6636	4078	1.06
SB208-25	1 9/16	40	3.1496	1.3386	0.7087	0.3543	0.2362	0.3150	5/16-24UNF			0.99
SB208			80	34	18	9	6	8	M8X1			0.99
SB209-27	1 11/16									7120	4650	1.76
SB209-28	1 3/4	45	3.346	1.6220	0.7480	0.4016	0.2480	0.3150	5/16-24UNF			
SB209			85	41.2	19	10.2	6.3	8	M8X1			
SB210-31	1 15/16									7884	5210	1.92
SB210		50	3.5433	1.7126	0.7874	0.4291	0.2598	0.3543	5/16-24UNF			
SB210-32	2		90	43.5	20	10.9	6.6	9	M8X1			

Add suffix "G" for regreasable bearing.

Prefix "C" with cylindrical outside diameter