
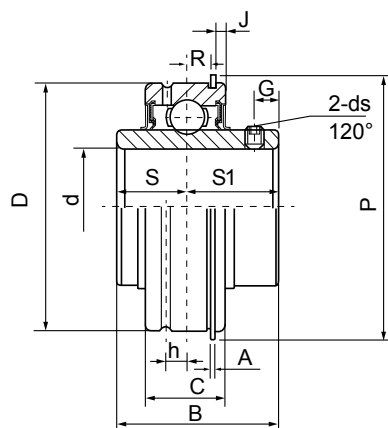


**HI-LIGHT USA**

WWW.HILIGHTUSA.COM

SER**BEARING INSERTS
NORMAL DUTY****Set Screw Locking • Wide Inner Ring • Cylindrical OD • Regreasable • Snap Ring**

Standard B Type Seal

HLU Bearing No.	Bore Diameter d		Dimensions (in.) (mm)											Load Ratings lbs		Weight lbs	
	in.	mm	D	B	C	S	S1	h	P	R	J	A	G	ds	Dynamic Cr		Static Cor
SER201-08	1/2	15													2886	1495	.60
SER202																	.55
SER202-10	5/8		1.8504	1.2205	0.6300	0.5000	0.7206	0.1575	2.0748	0.1783	0.0945	0.0421	0.1969	1/4-28UNF			.53
SER203			47	31	16	12.7	18.3	4	52.7	4.53	2.4	1.07	5	M6x0.75			.51
SER204-12	3/4	20															.49
SER204																	.44
SER205-14	7/8	25													3152	1771	.51
SER205-15	15/16		2.0472	1.3425	0.7480	0.5630	0.7795	0.1693	2.2795	0.2374	0.0945	0.0421	0.1969	1/4-28UNF			.49
SER205			52	34.1	19	14.3	19.8	4.3	57.9	6.03	2.4	1.07	5	M6x0.75			.46
SER205-16	1																.44
SER205-16BO*	1		2.0472	1.3740	0.7480	0.5157	0.8583	0.1772	2.2657	0.2374	0.0945	0.0421	0.2165	1/4-28UNF	3152	1771	.47
SER206-17	1 1/16	30													4375	2542	.84
SER206-18	1 1/8		2.4409	1.5000	0.8661	0.6260	0.8740	0.2165	2.6654	0.2421	0.1260	0.0650	0.1969	1/4-28UNF			.82
SER206			62	38.1	22	15.9	22.2	5.5	67.7	6.15	3.2	1.65	5	M6x0.75			.77
SER206-19	1 3/16																.77
SER206-20	1 1/4																.77
SER207-20	1 1/4	35													5771	3439	1.23
SER207-21	1 5/16		2.8346	1.6890	0.9449	0.6890	1.0000	0.2362	3.0906	0.2815	0.1260	0.0650	0.2362	5/16-24UNF			1.19
SER207-22	1 3/8		72	42.9	24	17.5	25.4	6	78.4	7.15	3.2	1.65	6	M8x1			1.15
SER207																	1.12
SER207-23	1 7/16																1.06
SER208-24	1 1/2	40													6636	4078	1.59
SER208-25	1 9/16		3.1496	1.9370	1.1024	0.7480	1.1890	0.2953	3.4094	0.3602	0.1260	0.0650	0.3150	5/16-24UNF			1.50
SER208			80	49.2	28	19	30.2	7.5	86.6	9.15	3.2	1.65	8	M8x1			1.59
SER209-26	1 5/8	45													7119	4649	1.98
SER209-27	1 11/16		3.3465	1.9370	1.1024	0.7480	1.1890	0.2953	3.6063	0.3602	0.1260	0.0650	0.3150	5/16-24UNF			1.76
SER209-28	1 3/4		85	49.2	28	19	30.2	7.5	91.6	9.15	3.2	1.65	8	M8x1			1.81
SER209																	1.79
SER210-30	1 7/8	50													7884	5211	2.03
SER210-31	1 15/16		3.5433	2.0315	1.1024	0.7480	1.2835	0.2953	3.7992	0.3303	0.1260	0.0949	0.3543	3/8-24UNF			1.92
SER210			90	51.6	28	19	32.6	7.5	96.5	8.39	3.2	2.41	9	M10x1.25			1.90
SER210-32	2																1.87
SER211-32	2	55													9752	6569	2.82
SER211-34	2 1/8		3.9370	2.1890	1.1811	0.8740	1.3150	0.3150	4.1929	0.3697	0.1260	0.949	0.3543	3/8-24UNF			2.60
SER211	2 1/8		100	55.6	30	22.2	33.4	8	106.5	9.39	3.2	2.41	9	M10x1.25			2.54
SER211-35	2 3/16																2.47
SER212-36	2 1/4	60													10736	7403	3.75
SER212			4.3307	2.5630	1.2598	1.0000	1.5630	0.3346	4.5906	0.4091	0.1260	0.0949	0.3937	3/8-24UNF			3.48
SER212-38	2 3/8		110	65.1	32	25.4	39.7	8.5	116.6	10.39	3.2	2.41	10	M10x1.25			3.44
SER212-39	2 7/16																3.26
SER215		75													14862	11128	6.31
SER215-47	2 15/16		5.1181	3.0630	1.4961	1.3110	1.7520	0.4016	5.5000	0.4815	0.1575	0.1091	0.4724	7/16-20UNF			
SER215-48	3		130	77.8	38	33.3	44.5	10.2	139.7	12.23	4	2.77	12	M12x1.5			

*Bearing has Black Oxide Finish.
All sizes furnished with Snap Ring.