
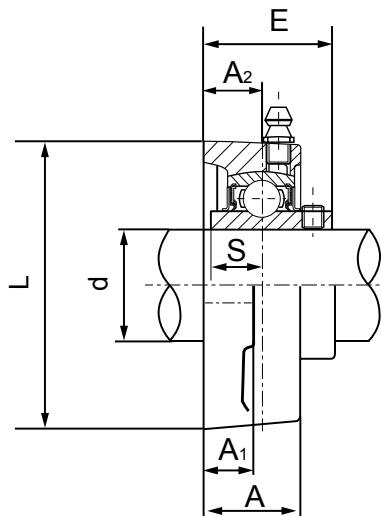
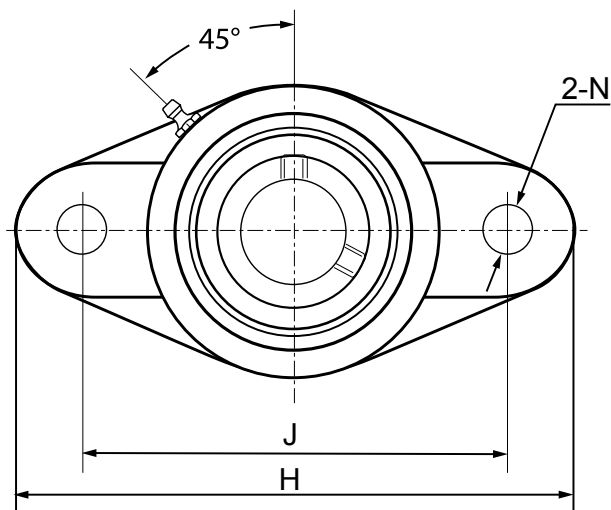


Standard B Type Seal



Optional Triple-lip seal
(+ Suffix - R3)

HLU Unit No.	Shaft Diameter		Dimensions (in.) (mm)									Bolt Used (in.) (mm)	Bearing No.	Housing No.	Weight lbs
			H	J	L	A2	A1	A	N	E	S				
UCFLX05 UCFLX05-16	1	25	5.8268 148	4.6063 117	3.1496 80	0.7087 18	0.5118 13	1.2205 31	0.4528 11.5	1.5827 40.2	0.6260 15.9	7/16 11	UCX05 UCX05-16	FL206	2.00
UCFLX06 UCFLX06-19 UCFLX06-20	1 3/16 1 1/4	30	6.3386 161	5.1181 130	3.5433 90	0.7480 19	0.5906 15	1.3386 34	0.5118 13	1.7480 44.4	0.6890 17.5	1/2 12	UCX06 UCX06-19 UC207-20	FL207	2.75
UCFLX07-22 UCFLX07 UCFLX07-23	1 3/8 1 7/16	35	6.8898 175	5.6693 144	3.9370 100	0.8268 21	0.5906 15	1.4173 36	0.5118 13	2.0157 51.2	0.7480 19.0	1/2 12	UCX07-22 UCX07 UCX07-23	FL208	3.50
UCFLX08-24 UCFLX08	1 1/2	40	7.4016 188	5.8268 148	4.2520 108	0.8661 22	0.6299 16	1.4961 38	0.5906 15	2.0551 52.2	0.7480 19.0	9/16 14	UCX08-24 UCX08	FL209	4.35
UCFLX09-27 UCFLX09-28 UCFLX09	1 11/16 1 3/4	45	7.7559 197	6.1811 157	4.5276 115	0.8661 22	0.6299 16	1.5748 40	0.5906 15	2.1496 54.6	0.7480 19.0	9/16 14	UCX09-27 UCX09-28 UCX09	FL210	5.35
UCFLX10-31 UCFLX10 UCFLX10-32	1 15/16 2	50	8.8189 224	7.2441 184	5.1181 130	0.9842 25	0.7087 18	1.6929 43	0.6496 16.5	2.2992 58.4	0.8740 22.2	5/8 16	UCX10-31 UCX10 UC211-32	FL211	6.90
UCFLX11 UCFLX11-35 UCFLX11-36	2 3/16 2 1/4	55	9.8425 250	7.9528 202	5.5118 140	1.1417 29	0.7087 18	1.8898 48	0.6496 16.5	2.7047 68.7	1.0000 25.4	5/8 16	UCX11 UCX11-35 UC212-36	FL212	8.85