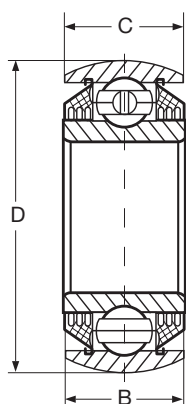
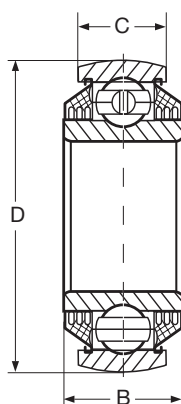
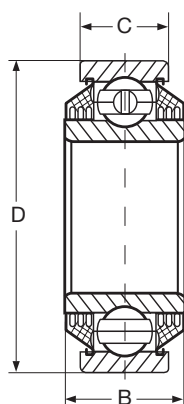
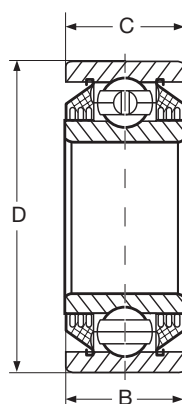
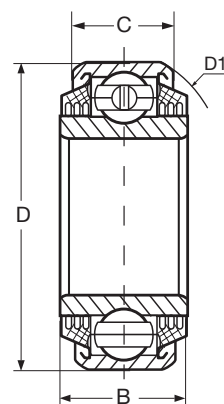



**HI-LIGHT USA**

WWW.HILIGHTUSA.COM

DISC HARROW BEARINGS

Round Bore • Non-Regreasable • Triple Lip Seals**Type 1****Type 2****Type 3****Type 4****Type 5**

Triple-lip seal

HLU Bearing No.	Type	Shaft Size	Dimensions (in.) (mm)							Load Ratings lbs		Weight lbs
			d Bore Nominal	+ 0 to minus Bore Tolerance	D Outer Diameter	+ 0 to minus Outer Tolerance	D1 Corner Diameter	C Outer Ring Width	B Inner Ring Width	Dynamic Cr	Static Cor	
W208PPB2	2	1 1/2	1.5005 38.113	.0005 .013	3.1496 80	.0005 .013	-	0.7087 18	1.6880 42.875	8093	4456	1.33
W208PPB7	2	1 3/16	1.1880 30.175	.0005 .013	3.1496 80	.0005 .013	-	0.7087 18	1.1880 30.175	8093	4456	1.30
W209PPB2	1	1 3/4	1.7717 45	.0005 .013	3.3465 85	.0006 .015	-	1.1880 30.175	1.1880 30.175	8093	4602	1.23
W209PPB4	1	1 1/2	1.5354 39	.0098 .250	3.3465 85	.0006 .015	-	1.1880 30.175	1.1880 30.175	8093	4602	1.47
W210PP2	4	1 15/16	1.9380 49.225	.0005 .013	3.5433 90	.0006 .015	-	1.1880 30.175	1.1880 30.175	8835	5215	1.50
W210PPB2	1	1 15/16	1.9380 49.225	.0005 .013	3.5433 90	.0006 .015	-	1.1880 30.175	1.1880 30.175	8835	5215	1.37
W210PPB9	2	1 15/16	1.9448 49.400	.007 .178	3.5433 90	.0006 .015	-	0.9055 23	1.4382 36.530	8835	5215	1.37
W211PP2	4	2 3/16	2.1880 55.575	.0006 .015	3.9370 100	.0006 .015	-	1.3120 33.325	1.3120 33.325	9756	6571	1.95
W211PPB2	1	2 3/16	2.1880 55.575	.0006 .015	3.9370 100	.0006 .015	-	1.3120 33.325	1.3120 33.325	9756	6571	1.86
ST627	5	2 3/16	2.1895 55.61	.002 .050	3.9370 100	.0006 .015	3.9567 100.50	1.3125 33.34	2.1875 55.56	9752	6569	2.45