


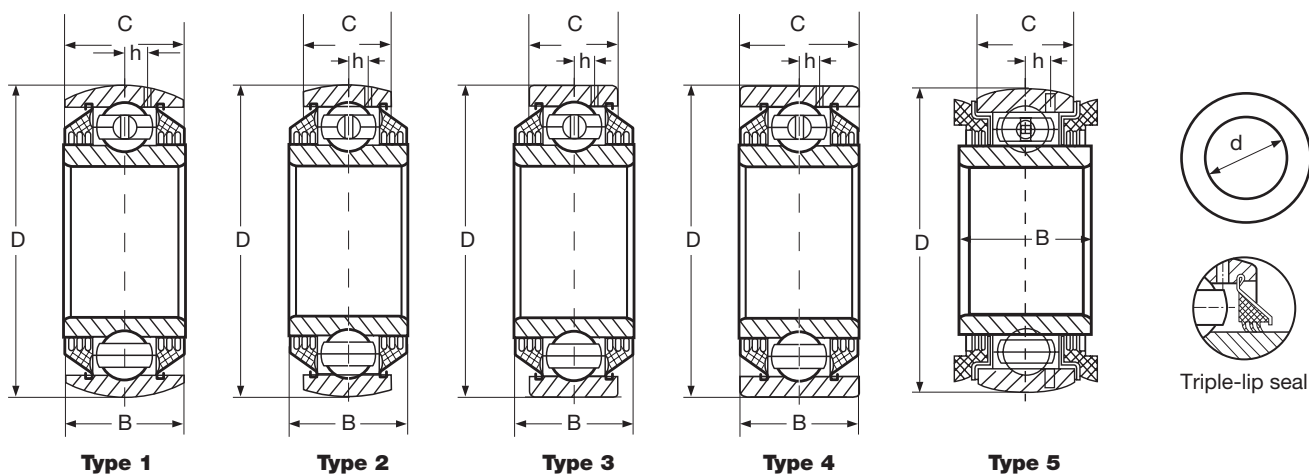

| HLU Bearing No. | Type | Shaft Size<br>in. | Dimensions <sup>(in.)</sup> <sub>(mm)</sub> |                                      |                        |                                       |                                 |                             |                             | Load Ratings<br>lbs |               | Weight<br>lbs |
|-----------------|------|-------------------|---------------------------------------------|--------------------------------------|------------------------|---------------------------------------|---------------------------------|-----------------------------|-----------------------------|---------------------|---------------|---------------|
|                 |      |                   | d<br>Bore<br>Nominal                        | + 0<br>to minus<br>Bore<br>Tolerance | D<br>Outer<br>Diameter | + 0<br>to minus<br>Outer<br>Tolerance | h<br>Relube<br>Hole<br>Location | C<br>Outer<br>Ring<br>Width | B<br>Inner<br>Ring<br>Width | Dynamic<br>Cr       | Static<br>Cor |               |
| GW209PPB2       | 1    | 1 3/4             | 1.7717<br>45.00                             | .0005<br>.013                        | 3.3465<br>85           | .0006<br>.015                         | .2480<br>6.30                   | 1.1880<br>30.175            | 1.1880<br>30.175            | 8093                | 4602          | 1.22          |
| GW209PPB4       | 1    | 1 1/2             | 1.535<br>39.00                              | .0100<br>.250                        | 3.3465<br>85           | .0006<br>.015                         | .2480<br>6.30                   | 1.1880<br>30.175            | 1.1880<br>30.175            | 8093                | 4602          | 1.47          |
| GW209PPB11      | 2    | 1 3/4             | 1.7811<br>45.24                             | .0100<br>.250                        | 3.3465<br>85           | .0006<br>.015                         | .2539<br>6.45                   | .8661<br>22                 | 1.4380<br>36.525            | 8093                | 4602          | 1.28          |
| ST209-1 1/2JD   | 5    | 1 1/2             | 1.5300<br>38.86                             | .0100<br>.250                        | 3.3465<br>85           | .0006<br>.015                         | .2594<br>6.59                   | 1.1880<br>30.18             | 1.4380<br>36.53             | 8093                | 4602          | 1.80          |
| ST209-1 3/4JD   | 5    | 1 3/4             | 1.7811<br>45.24                             | .0100<br>.250                        | 3.3465<br>85           | .0006<br>.015                         | .2594<br>6.59                   | 1.1880<br>30.18             | 1.4380<br>36.53             | 8093                | 4602          | 1.55          |
| GW210PPB2       | 1    | 1 15/16           | 1.9380<br>49.225                            | .0006<br>.015                        | 3.5433<br>90           | .0006<br>.015                         | .2390<br>6.07                   | 1.1880<br>30.175            | 1.1880<br>30.175            | 8835                | 5215          | 1.36          |
| GW210PPB5       | 1    | 1 3/4             | 1.7850<br>45.339                            | .0100<br>.250                        | 3.5433<br>90           | .0006<br>.015                         | .2390<br>6.07                   | 1.1880<br>30.175            | 1.1880<br>30.175            | 8835                | 5215          | 1.65          |
| GW211PP25       | 3    | 1 3/4             | 1.780<br>45.212                             | .005<br>.127                         | 3.9370<br>100          | .0006<br>.015                         | .370<br>9.40                    | 1.312<br>33.325             | 1.750<br>44.45              | 9752                | 6570          | 2.98          |
| GW211PP2        | 4    | 2 3/16            | 2.1880<br>55.575                            | .0006<br>.015                        | 3.9370<br>100          | .0006<br>.015                         | .2638<br>6.70                   | 1.3120<br>33.325            | 1.3120<br>33.325            | 9756                | 6571          | 1.95          |
| GW211PPB2       | 1    | 2 3/16            | 2.1880<br>55.575                            | .0006<br>.015                        | 3.9370<br>100          | .0006<br>.015                         | .2638<br>6.70                   | 1.3120<br>33.325            | 1.3120<br>33.325            | 9756                | 6571          | 1.85          |
| GW211PPB9       | 2    | 2 3/16            | 2.1950<br>55.75                             | .0070<br>.180                        | 3.9370<br>100          | .0006<br>.015                         | .2756<br>7.00                   | .9843<br>25                 | 1.5620<br>39.69             | 9756                | 6571          | 1.86          |
| GW211PPB13      | 2    | 1 3/4             | 1.7850<br>45.339                            | .0100<br>.254                        | 3.9370<br>100          | .0006<br>.015                         | .2756<br>7.00                   | .9843<br>25                 | 1.3120<br>33.325            | 9756                | 6571          | 2.16          |
| ST211-2 3/16JD  | 5    | 2 3/16            | 2.2047<br>56.00                             | .0100<br>.250                        | 3.9370<br>100          | .0006<br>.015                         | .3020<br>7.67                   | 1.3120<br>33.34             | 1.5630<br>39.70             | 9756                | 6571          | 2.26          |
| DC214TTR2A      | 3    | 2 3/4             | 2.7657<br>70.25                             | .0020<br>.050                        | 4.9213<br>125          | .0007<br>.018                         | .3669<br>9.32                   | 1.5590<br>39.6              | 2.000<br>50.8               | 13980               | 9891          | 4.20          |
| GW214PPB2       | 1    | 2 3/4             | 2.7560<br>70                                | .0006<br>.015                        | 4.9213<br>125          | .0008<br>.020                         | .414<br>10.52                   | 1.5626<br>39.69             | 1.5636<br>39.69             | 13980               | 9891          | 3.60          |