


**HI-LIGHT USA**

WWW.HILIGHTUSA.COM

STEEL PINTLE CHAIN

Enduroline Series • 600 Class

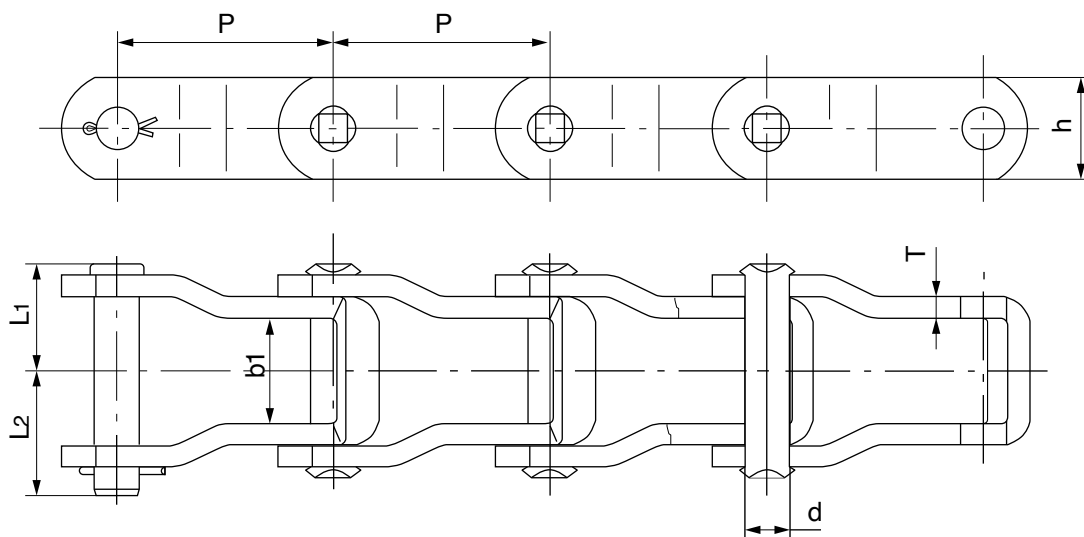

HLU ANSI No.	P	b1	d	L1	L2	h	T	Ultimate Tensile Strength (min)	Average Tensile Strength	Weight
	in.	in.	in.	in.	in.	in.	in.	lbs	lbs	lbs/ft
662	1.664	0.906	0.281	0.805	0.931	0.720	0.125	9,500	11,200	1.20
667X	2.250	1.063	0.437	1.006	1.132	0.937	0.170	20,000	21,700	2.00
667H	2.313	1.000	0.312	0.852	0.963	0.875	0.125	11,700	12,900	1.25
667K	2.250	1.043	0.437	1.091	1.217	1.055	0.200	24,000	27,700	2.60
88K	2.609	1.043	0.437	1.091	1.217	1.062	0.200	24,000	27,700	2.50
D205	1.250	0.370	0.200	0.433	0.528	0.470	0.082	4,050	4,900	0.45
667XH	2.250	1.043	0.469	1.142	1.272	1.055	0.225	28,000	31,000	2.95
* 88C	2.609	1.250	0.500	1.285	1.404	1.125	0.252	34,200	38,000	3.60
308C	3.075	1.280	0.625	1.498	1.652	1.500	0.315	45,000	50,000	5.70

* Interchanges with 88XH