
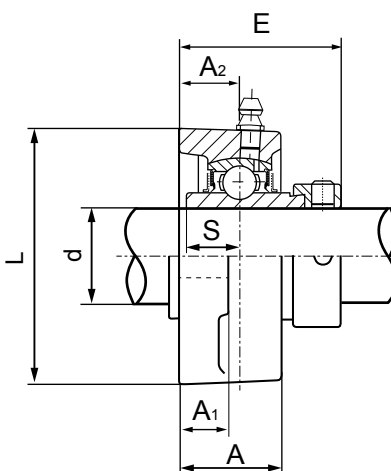
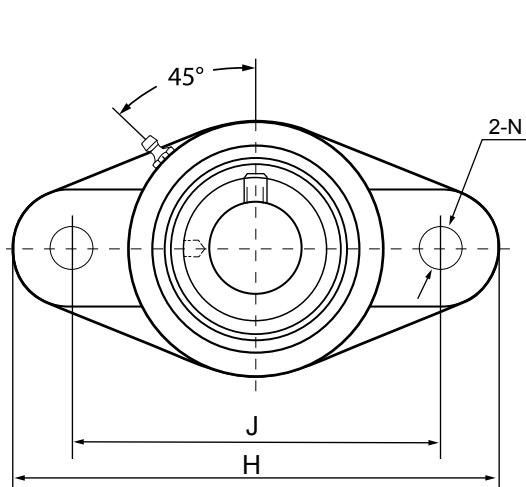


Standard B Type Seal



Optional Triple-lip seal
(+ Suffix - R3)

HLU Unit No.	Shaft Diameter		Dimensions (in.) (mm)									Bolt Used (in.) (mm)	Bearing No.	Housing No.	Weight lbs
	in.	mm	H	J	L	A2	A1	A	N	E	S				
NANFL201-08 NANFL202-10 NANFL203	1/2 5/8	17	3.8976 99	3.0118 76.5	2.2441 57	0.5906 15	0.4331 11	1.0039 25.5	0.3937 10	1.5118 38.4	0.5472 13.9	3/8 10	NA201-08 NA202-10 NA203	FL203	1.10
NANFL204-10 NANFL204-12 NANFL204	5/8 3/4	20	4.4291 112.5	3.5315 89.7	2.3819 60.5	0.7480 19	0.5906 15	1.1417 29	0.3937 10	1.7953 45.6	0.6732 17.1	3/8 10	NA204-10 NA204-12 NA204	NFL204	1.20
NANFL205-14 NANFL205-15 NANFL205 NANFL205-16	7/8 1 1/16 1	25	4.8819 124	3.8976 99	2.7559 70	0.7480 19	0.5906 15	1.2008 30.5	0.4528 11.5	1.8071 45.9	0.6890 17.5	3/8 10	NA205-14 NA205-15 NA205 NA205-16	NFL205	1.55
NANFL206-17 NANFL206-18 NANFL206 NANFL206-19 NANFL206-20	1 1/16 1 1/8 1 3/16 1 1/4	30	5.5906 142	4.5945 116.7	3.2677 83	0.7874 20	0.6299 16	1.3189 33.5	0.4528 11.5	1.9724 50.1	0.7205 18.3	3/8 10	NA206-17 NA206-18 NA206 NA206-19 NA206-20	NFL206	2.40
NANFL207-20 NANFL207-21 NANFL207-22 NANFL207 NANFL207-23	1 1/4 1 5/16 1 3/8 1 7/16	35	6.3386 161	5.1260 130.2	3.5433 90	0.8465 21.5	0.5512 14	1.4370 36.5	0.5118 13	2.1181 53.8	0.7402 18.8	1/2 12	NA207-20 NA207-21 NA207-22 NA207 NA207-23	NFL207	3.15
NANFL208-24 NANFL208-25 NANFL208	1 1/2 1 5/8	40	6.7323 171	5.6575 143.7	3.9764 101	0.9449 24	0.6496 16.5	1.5354 39	0.5118 13	2.3189 58.9	0.8425 21.4	1/2 12	NA208-24 NA208-25 NA208	NFL208	3.70
NANFL209-26 NANFL209-27 NANFL209-28 NANFL209	1 5/8 1 11/16 1 3/4	45	7.0472 179	5.8465 148.5	4.3701 111	0.9449 24	0.6496 16.5	1.5748 40	0.5906 15	2.3189 58.9	0.8425 21.4	5/8 14	NA209-26 NA209-27 NA209-28 NA209	NFL209	4.45
NANFL210-30 NANFL210-31 NANFL210 NANFL210-32	1 7/8 1 15/16 2	50	7.4409 189	6.1890 157.2	4.5669 116	1.1024 28	0.8031 20.4	1.7717 45	0.5906 15	2.6024 66.1	0.9685 24.6	5/8 14	NA210-30 NA210-31 NA210 NA210-32	NFL210	5.30
NANFL211-32 NANFL211-34 NANFL211 NANFL211-35	2 2 1/8 2 3/16	55	8.5039 216	7.2480 184.1	5.2362 133	1.2205 31	0.8031 20.4	1.8898 48	0.6496 16.5	2.9370 74.6	1.0945 27.8	5/8 16	NA211-32 NA211-34 NA211 NA211-35	NFL211	8.00
NANFL212-36 NANFL212 NANFL212-38 NANFL212-39	2 1/4 2 3/8 2 7/16	60	9.3307 237	7.9528 202	5.4331 138	1.3386 34	0.8268 21	2.0866 53	0.6496 16.5	3.1811 80.8	1.2205 31	5/8 16	NA212-36 NA212 NA212-38 NA212-39	NFL212	8.85