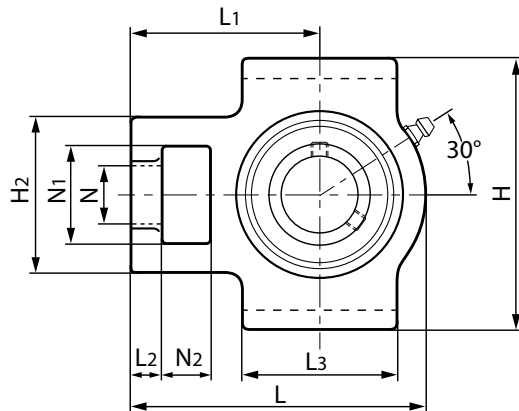


Standard B Type Seal


 Optional Triple-lip seal
(+ Suffix - R3)

HLU Unit No.	Shaft Diameter		Dimensions (in.) (mm)															Bearing No.	Housing No.	Weight lbs
			L	L1	L2	L3	N	N1	N2	H	H1	H2	A	A1	A2	S	B			
UCT204-08	1/2		3.7008	2.4016	0.3937	2.0079	0.7480	1.2598	0.6299	3.5039	2.9921	2.0079	1.2598	0.5315	0.8268	0.500	1.2205	T204		1.85
UCT204-10	5/8		94	61	10	51	19	32	16	89	76	51	32	13.5	21	12.7	31			1.80
UCT204-12	3/4																			1.80
UCT204		20																		1.75
UCT205-14	7/8		3.8189	2.4409	0.3937	2.0079	0.7480	1.2598	0.6299	3.5039	2.9921	2.0079	1.2598	0.5315	0.9449	0.5630	1.3425	T205		1.85
UCT205-15	1 1/16		97	62	10	51	19	32	16	89	76	51	32	13.5	24	14.3	34.1			1.85
UCT205		25																		1.80
UCT205-16	1																			1.75
UCT206-17	1 1/8																	T206		2.75
UCT206-18	1 1/8		4.4488	2.7559	0.3937	2.2441	0.8661	1.4567	0.6299	4.0157	3.5039	2.2047	1.4567	0.5315	1.1024	0.6260	1.5000			2.65
UCT206		30	113	70	10	57	22	37	16	102	89	56	37	13.5	28	15.9	38.1			2.65
UCT206-19	1 3/8																			2.65
UCT206-20	1 1/4																			2.60
UCT207-20	1 1/4																	T207		3.60
UCT207-21	1 3/8		5.0787	3.0709	0.5118	2.5197	0.8661	1.4567	0.6299	4.0157	3.5039	2.5197	1.4567	0.5315	1.1811	0.6890	1.6890			3.55
UCT207-22	1 3/8		129	78	13	64	22	37	16	102	89	64	37	13.5	30	17.5	42.9			3.50
UCT207		35																		3.45
UCT207-23	1 7/8																			3.45
UCT208-24	1 1/2		5.6693	3.4646	0.6299	3.2677	1.1417	1.9291	0.7480	4.4882	3.9764	3.2677	1.9291	0.6890	1.2992	0.7480	1.9370	T208		5.15
UCT208-25	1 1/8		144	88	16	83	29	49	19	114	101	83	49	17.5	33	19	49.2			5.10
UCT208		40																		5.00
UCT209-26	1 5/8																	T209		5.25
UCT209-27	1 11/16		5.6693	3.4252	0.6299	3.2677	1.1417	1.9291	0.7480	4.6063	3.9764	3.2677	1.9291	0.6890	1.3780	0.7480	1.9370			5.30
UCT209-28	1 3/4		144	87	16	83	29	49	19	117	101	83	49	17.5	35	19	49.2			5.20
UCT209		45																		5.05
UCT210-30	1 7/8																	T210		5.55
UCT210-31	1 15/16		5.8661	3.5433	0.6299	3.3858	1.1417	1.9291	0.7480	4.6063	3.9764	3.2677	1.9291	0.6890	1.4567	0.7480	2.0315			5.50
UCT210		50	149	90	16	86	29	49	19	117	101	83	49	17.5	37	19	51.6			5.40
UCT210-32	2																			5.35
UCT211-32	2																	T211		8.50
UCT211-34	2 1/8		6.7323	4.1732	0.7480	3.7405	1.3780	2.5197	0.9843	5.7480	5.1181	4.0157	2.5197	1.0630	1.4961	0.8740	2.1890			8.35
UCT211		55	171	106	19	95	35	64	25	146	130	102	64	27	38	22.2	55.6			8.20
UCT211-35	2 3/8																	T212		8.20
UCT212-36	2 1/4																			10.35
UCT212		60	7.6378	4.6850	0.7480	4.0157	1.3780	2.5197	1.2598	5.7480	5.1181	4.0157	2.5197	1.0630	1.6535	1.0000	2.5630			10.10
UCT212-38	2 3/8		194	119	19	102	35	64	32	146	130	102	64	27	42	25.4	65.1			9.95
UCT212-39	2 7/8																	T215		9.85
UCT215		75																		16.15
UCT215-47	2 15/16		9.1339	5.5118	0.8268	4.7638	1.6142	2.7559	1.2598	6.5748	5.9449	4.3701	2.7559	1.0630	1.8898	1.3110	3.0630			16.25
UCT215-48	3		232	140	21	121	41	70	32	167	151	111	70	27	48	33.3	77.8			15.40