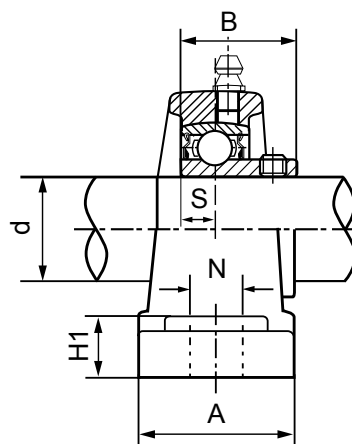
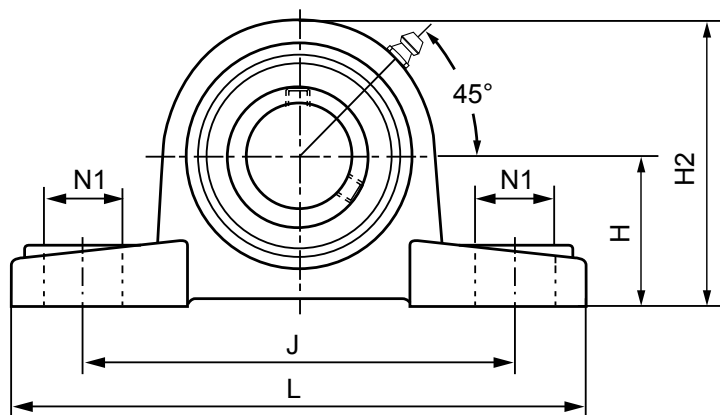

K Type Seal

HLU Unit No.	Shaft Diameter		Dimensions (in.) (mm)										Bolt Used (in.) (mm)	Bearing No.	Housing No.	Weight lbs
	in.	mm	H	L	J	A	N	N1	H1	H2	S	B				
SBP201-08G SBP202G SBP202-10G SBP203G	1/2 5/8	15 17	1.1890 30.2	4.8819 124	3.7402 95	1.2598 32	0.4724 12	0.6299 16	0.5118 13	2.2835 58	0.2362 6	0.8661 22	3/8 10	SB201-08G SB202G SB202-10G SB203G	P203	1.25
SBP204-12G SBP204G	3/4	20	1.3110 33.3	5.0000 127	3.7402 95	1.3780 35	0.5118 13	0.7480 19	0.5512 14	2.5591 65	0.2756 7	0.9842 25	3/8 10	SB204-12G SB204G	P204	1.40
SBP205-14G SBP205-15G SBP205G SBP205-16G	7/8 15/16 1	25	1.4370 36.5	5.5118 140	4.1338 105	1.4961 38	0.5118 13	0.7480 19	0.5906 15	2.7953 71	0.2953 7.5	1.0630 27	3/8 10	SB205-14G SB205-15G SB205G SB205-16G	P205	1.90
SBP206-18G SBP206G SBP206-19G SBP206-20G	1 1/8 1 3/16 1 1/4	30	1.6890 42.9	6.2992 160	4.7638 121	1.7323 44	0.5512 14	0.7480 19	0.6693 17	3.2677 83	0.3150 8	1.1811 30	1/2 12	SB206-18G SB206G SB206-19G SB206-20G	P206	2.80
SBP207-20G SBP207-21G SBP207-22G SBP207G SBP207-23G	1 1/4 1 5/16 1 3/8 1 7/16	35	1.8740 47.6	6.5748 167	5.0000 127	1.8898 48	0.5906 15	0.7480 19	0.7087 18	3.6614 93	0.3346 8.5	1.2598 32	1/2 12	SB207-20G SB207-21G SB207-22G SB207G SB207-23G	P207	3.70
SBP208-24G SBP208G	1 1/2	40	1.9370 49.2	7.0866 180	5.3939 137	2.1260 54	0.5906 15	0.8268 21	0.7480 19	3.8583 98	0.3543 9	1.3386 34	1/2 12	SB208-24G SB208G	P208	4.50
SBP209-27G SBP209-28G SBP209G	1 11/16 1 3/4	45	2.1260 54.0	7.4803 190	5.7480 146	2.1260 54	0.5906 15	0.8268 21	0.7874 20	4.1732 106	0.4016 10.2	1.6220 41.2	1/2 12	SB209-27G SB209-28G SB209G	P209	5.60
SBP210-31G SBP210G	1 15/16	50	2.2520 57.2	8.1102 206	6.2598 159	2.3622 60	0.7480 19	0.8661 22	0.8268 21	4.4882 114	0.4291 10.9	1.7126 43.5	5/8 16	SB210-31G SB210G	P210	6.75

Normally supplied as relube with "G" suffix.

Non-relube units available. Please specify non-relube.