
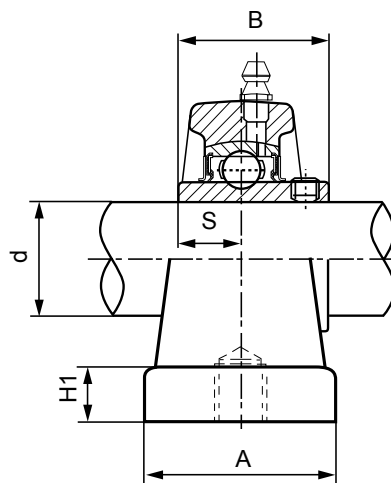
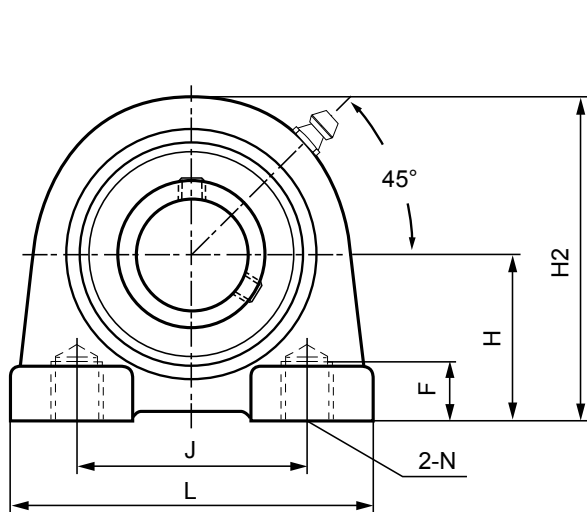


Standard B Type Seal



Optional Triple-lip seal
(+ Suffix - R3)

HLU Unit No.	Shaft Diameter		Dimensions (in.) (mm)									Tapped Holes	Bearing No.	Housing No.	Weight lbs
			H	L	J	A	H1	H2	F	S	B	2-N			
UCPA204-08 UCPA204-10 UCPA204-12 UCPA204	1/2 5/8 3/4	20	1.3110 33.3	2.8740 73	2.0000 50.8	1.4961 38	0.4331 11	2.5591 65	1/2 13	0.500 12.7	1.2205 31	3/8 - 16UNC	UC204-08 UC204-10 UC204-12 UC204	PA204	1.45
UCPA205-14 UCPA205-15 UCPA205 UCPA205-16	7/8 15/16 1	25	1.4370 36.5	2.9921 76	2.0000 50.8	1.4961 38	0.4724 12	2.7953 71	1/2 13	0.5630 14.3	1.3425 34.1	3/8 - 16UNC	UC205-14 UC205-15 UC205 UC205-16	PA205	1.60
UCPA206-17 UCPA206-18 UCPA206 UCPA206-19 UCPA206-20	1 1/16 1 1/8 1 3/16 1 1/4	30	1.6890 42.9	4.0157 102	3.0000 76.2	1.4961 38	0.4724 12	3.4252 87	5/8 16	0.6260 15.9	1.5000 38.1	7/16 - 14UNC	UC206-17 UC206-18 UC206 UC206-19 UC206-20	PA206	2.75
UCPA207-20 UCPA207-21 UCPA207-22 UCPA207 UCPA207-23	1 1/4 1 5/16 1 3/8 1 7/16	35	1.8740 47.6	4.2520 108	3.2480 82.5	1.8898 48	0.4724 12	3.7402 95	3/4 19	0.6890 17.5	1.6890 42.9	1/2 - 13UNC	UC207-20 UC207-21 UC207-22 UC207 UC207-23	PA207	3.60
UCPA208-24 UCPA208-25 UCPA208	1 1/2 1 9/16	40	1.9370 49.2	4.6260 117.5	3.5000 88.9	1.8898 48	0.4724 12	3.9370 100	3/4 19	0.7480 19	1.9370 49.2	1/2 - 13UNC	UC208-24 UC208-25 UC208	PA208	4.15
UCPA209-26 UCPA209-27 UCPA209-28 UCPA209	1 5/8 1 11/16 1 3/4	45	2.1260 54	5.0000 127	3.7520 95.3	2.0079 51	0.4724 12	4.2520 108	3/4 19	0.7480 19	1.9370 49.2	1/2 - 13UNC	UC209-26 UC209-27 UC209-28 UC209	PA209	5.10
UCPA210-30 UCPA210-31 UCPA210 UCPA210-32	1 7/8 1 15/16 2	50	2.2500 57.15	5.5118 140	4.0000 101.6	2.0079 51	0.5512 14	4.6260 117.5	31/32 25	0.7480 19	2.0315 51.6	5/8 - 11UNC	UC210-30 UC210-31 UC210 UC210-32	PA210	6.25